

Structural System to Resist Seismic Loads on High Rise

Reinforced Concrete Structures

P.Nagi Reddy¹, V.Raj Kumar²

¹Asst.professor, Civil Department, Newton's Institute Of Science & technology, Macherla, Andhra Pradesh (India)

ABSTRACT

The forces of nature represent the biggest challenge for engineering work in general and perhaps the most prominent of these forces. This generated by earthquake where engineering structure is exposed abnormal loads and stresses which places areal burden on structural engineers to find solutions and structural systems to increase resistance and effectiveness of engineering structure especially high rise concrete structures.

Keywords : Lateral Loads, Seismic Loads, Earthquake Loads, Axial Force

I. INTRODUCTION

Increasing the height of the building increases the effect of lateral loads on the building. The column-beam joints and the contact joint between column and the column in next floor are the prominent joints exposed to seismic loads in structure.

Strong column—weak beam joint is important concept in resisting seismic loads. This study is devoted to increase resist of structure by increase effectiveness and resistance of the contact joint between column and the column in next floor

(column-column joint). It is common in construction sites the pouring of concrete columns for each floor separately, the cohesion between columns one top of each for multiple stories structure by extension of steel bars mostly does not exceed 1.0 meter, so full height column of structure can be represented as a group of units of columns pouring one top of each, this may not represent a problem for low-rise structures but for sure represent a problem for high-rise structures especially when structure exposed to seismic loads as shown in (Figure 1 and Figure 2).




Figure 1: behavior of building structure under seismic loads



Figure 2: structures damaged due to earthquakes

II. SEARCH THEORY

The purpose of study to make each vertical group of columns to behave as one unit as if columns have poured once building length.

III. PRACTICAL APPLICATION

As shown in (Figure 3) in-site are pouring columns under axial force by hy-draulic jacks (Figure 4) that will retain until concrete hardening by using hy-draulic jacks then will pouring next floor columns under the same axial load that will retain until concrete hardening and repeat the same steps for each floor columns.

The cables used should be continuous full length of columns by using rolls of cables and installed in foundation steel bars.

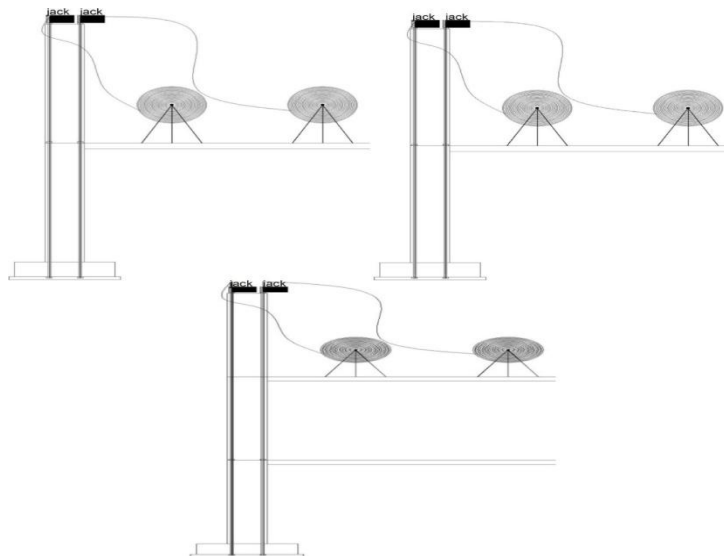


Figure3: steps to be implemented in site

The cables rolls should be moved from floor for the floor who followed with continuity of cables. Finally structure columns will be subjected to the same axial load full height of the building and every vertical row of columns will behave as one column.

IV. MATHEMATICAL ACHIEVEMENT

It is now generally recognized that beam-column joints can be critical regions in reinforced concrete frames can be critical regions in reinforced concrete frames designed for in elastic response to seismic attack.

As a consequence of seismic moments in columns of opposite signs immediately above and below the joint, and similar beam moment reversal across the joint.

The Joint region is subjected to horizontal and vertical shear forces. It is assumed that due to gravity loads and earthquake-induced lateral forces on the frame, typical moments, shear and axial forces introduced to an interior joint are shown in Figure 4 & Figure 5. To enable simple equilibrium requirements, compression stress in the concrete and steel by symbols (C_c), (C_s) respectively, horizontal joint shear force and vertical joint shear force are denoted



Figure 4. Shapes of hydraulic jacks

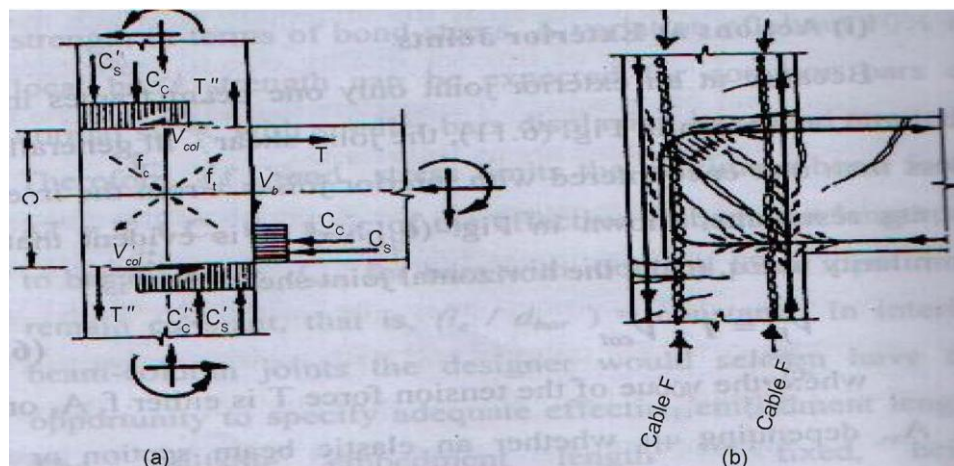


Figure 5. External actions and internal stress resultants at (beam—column joint)

by (V_{jh}, V_{jv}) respectively [2].

$$V_{jh} = T + C_c' + C_s' - V_{col} = T + C_c + C_s - V_{col}$$

$$(T' = C' + C')$$

C S

$$V_{jh} = T + T' - V_{col}$$

$$V_{jv} = T'' + T''' - P_u/2 - V_b - F_c \quad (F_c = \text{Cable force})$$

When we use this new technique in pouring columns we will generated new force is called Cable force (F_c) which is reduced shear forces on column-beam Joint and by controlling (F_c) we can prevented a chance to joint shear failure.

V. INDICATIONS

tension stress in steel bars in upper half of interior joint T' : tension stress in steel bars in lower half of interior joint T'' : tension stress in steel bars in right half of interior joint T''' : tension stress in steel bars in left half of interior joint

V_{col} .: the average of column shears above and below the joint

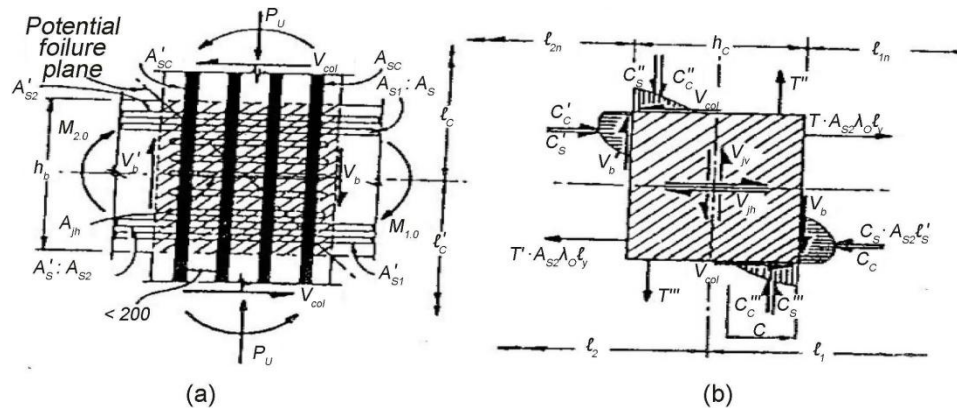


Figure 6. Analysis forces resultants at internal (beam—column joint)

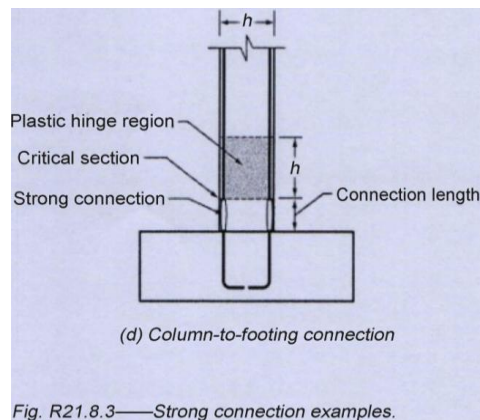


Figure 7. One of critical section may be happened in column

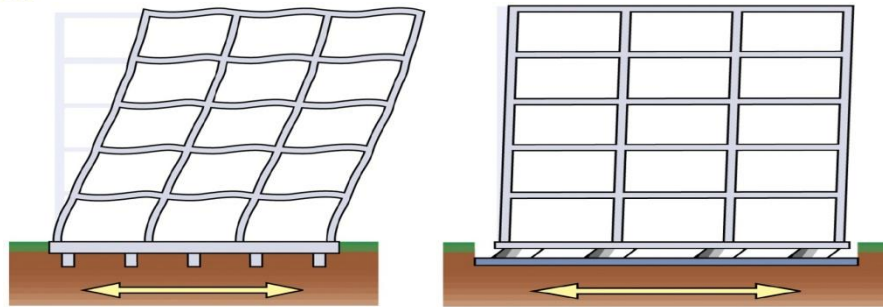


Figure 8. The effect of the system to increase resist of buildings to seismic loads

VI. CONCLUSIONS

The study will achieve important principle (strong column-column) joint and will give more support to critical section in columns (column-to-footing connection) (column-to-column connection) as shown in **Figure 7 & Figure 8**. **Figure 8** shows the effect of the suggested system to resist seismic loads, in the structure on the left columns behaves as one unit. Structure on the right where the normal method in building is used additional stresses which are generated in earthquakes.

REFERENCES

1. ACI Committee 318 (2008) Building Code Requirements for Reinforced Concrete (ACI 318-2008) and Commentary. American Concrete Institute, Farmington Hills, 348.
2. Yousef, A. (2010) Lectures Notes on: Design of Reinforced Concrete Structures— Part 111. Fourth Year Civil, El-Mansoura, 175-189.