

## ANALYSIS OF CERAMIC COATING ON PISTON SURFACE WITH $\text{SiO}_2$ AND $\text{ZrO}_2$

V. Mohan<sup>1</sup>, N.Surya<sup>2\*</sup>, D.Srinu<sup>3</sup>

<sup>1, 2\*, 3</sup> Assistant Professor, Department of Mechanical Engineering, TKRCET, Hyderabad, T.S, (India)

### ABSTRACT

*Aim of this report is to improve the efficiency, structural analysis of piston surface coated with ceramic layer. Generally aluminium alloy is used for piston material in I C engines and this material can withstand the structural, thermal analysis and power produced from the combustion of fuel. In this report the ceramic material like silicon and zirconium 0.4 mm thickness coating was applied on the surface of piston and test the coated surface using ansys software to analyze the structural analysis in order to get better results. The obtained results were deformation, stress, strain, safety factor and were comparable with the aluminium alloy.*

**Keywords:** Ansys, Ceramic Coating, Piston, Structural Analysis.

### I. INTRODUCTION

Today's generation I.C engines are playing very impotent role in an automobiles and mechanical machineries. The piston is a part of IC engine; it plays a vital role in almost all types of vehicles [1]. The main function of the piston of is to receive the impulse from the expanding gas and to transmit the energy to the crankshaft through the connecting rod [2]. And also disperse a large amount of heat from the combustion chamber to the cylinder walls. Cast iron, Aluminium Alloy and Cast Steel etc. are the common materials used for piston of an I.C Engine and to compare behaviour of the piston made of different type of materials under structural and thermal load [3]. The new composite material was primarily considered due to low hysteresis of the coefficient of thermal expansion for heating and cooling [4]. Piston skirt is the main area of the piston at which the deformation may appear usually it causes the crack on the upper end of piston head, due to this deformation, the greatest stress concentration is caused [5]. The existing piston is redesigned using Pro-E software and analyzed by ansys software. The coating of ceramic (magnesium oxide (MgO) and zirconium oxide (ZiO)) over existing aluminum alloy piston is done and behaviour is analyzed to improve the performance of the given engine [6]. The finite element results show that steel piston is showing maximum surface temperature than AlSi alloy piston, it is also observed from the results the surface temperature in uncoated piston is less than coated piston [7]. The maximum surface temperature of the coated piston with material which has low thermal conductivity has improved approximately by 14%. Because of reduced heat losses, efficiency will improve. According to the experimental results, brake thermal efficiency and indicated thermal efficiency have improved by 5.89% and 11.14% respectively [8]. The numerical simulations clearly show that temperature and thermal stress distribution are a function of coating thickness [9]. The maximum von mises stress in the piston crown is reduced with increase in bond coating thickness [10].

## II. DESIGN PARAMETERS

In this work, we have design one piston model by using CAD tool (CATIA) and then imported into CAE tool (ANSYS). To change the design of the piston by adding additive like  $\text{SiO}_2$  and  $\text{ZrO}_2$  0.4 mm thickness ceramic layer on the top surface of piston and applied 6 MPa pressure and analyzed the results using ANSYS.

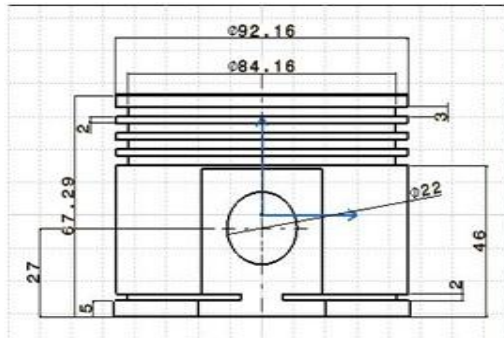


Fig.1. Piston Dimensions

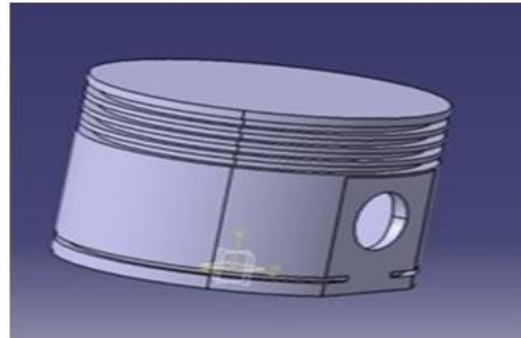


Fig.2. 3D Model of Piston

| Material                   | Young's modulus (Pa) | Poisson ratio | Density ( $\text{Kg/m}^3$ ) | Yield strength (MPa) | Conductivity (W/m.k) |
|----------------------------|----------------------|---------------|-----------------------------|----------------------|----------------------|
| Aluminium alloy            | $71.1 \times 10^9$   | 0.33          | 2770                        | 280                  | 160                  |
| Zirconia( $\text{ZrO}_2$ ) | $94.5 \times 10^9$   | 0.33          | 6530                        | 280                  | 2                    |
| Silica( $\text{SiO}_2$ )   | $74.8 \times 10^9$   | 0.19          | 2650                        | 155                  | 1.5                  |

Table.1. Properties of Aluminium Alloy Material

## III.STRUCTURAL ANALYSIS

ANSYS is the standard finite element analysis (FEA) software tool. Finite Element Analysis is a numerical method of deconstructing a complex system into very small pieces (of user-designated size) called elements. The software implements equations that govern the behaviour of these elements and solve them all, this type of analysis is typically used for analyze the structural analysis as follows.

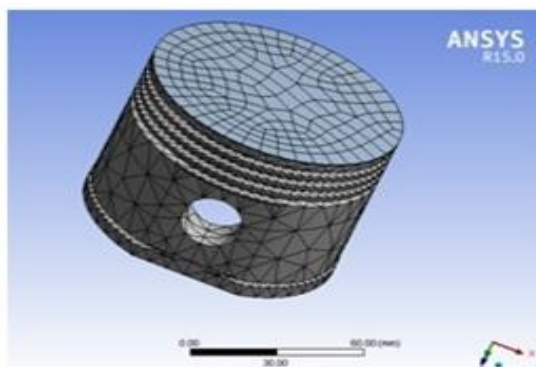


Fig.3. Finite Element Analysis

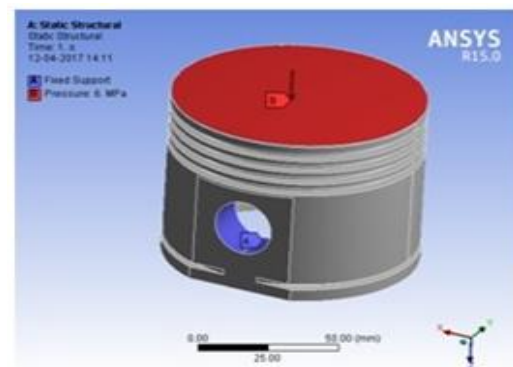


Fig.4. Fixed supports on piston

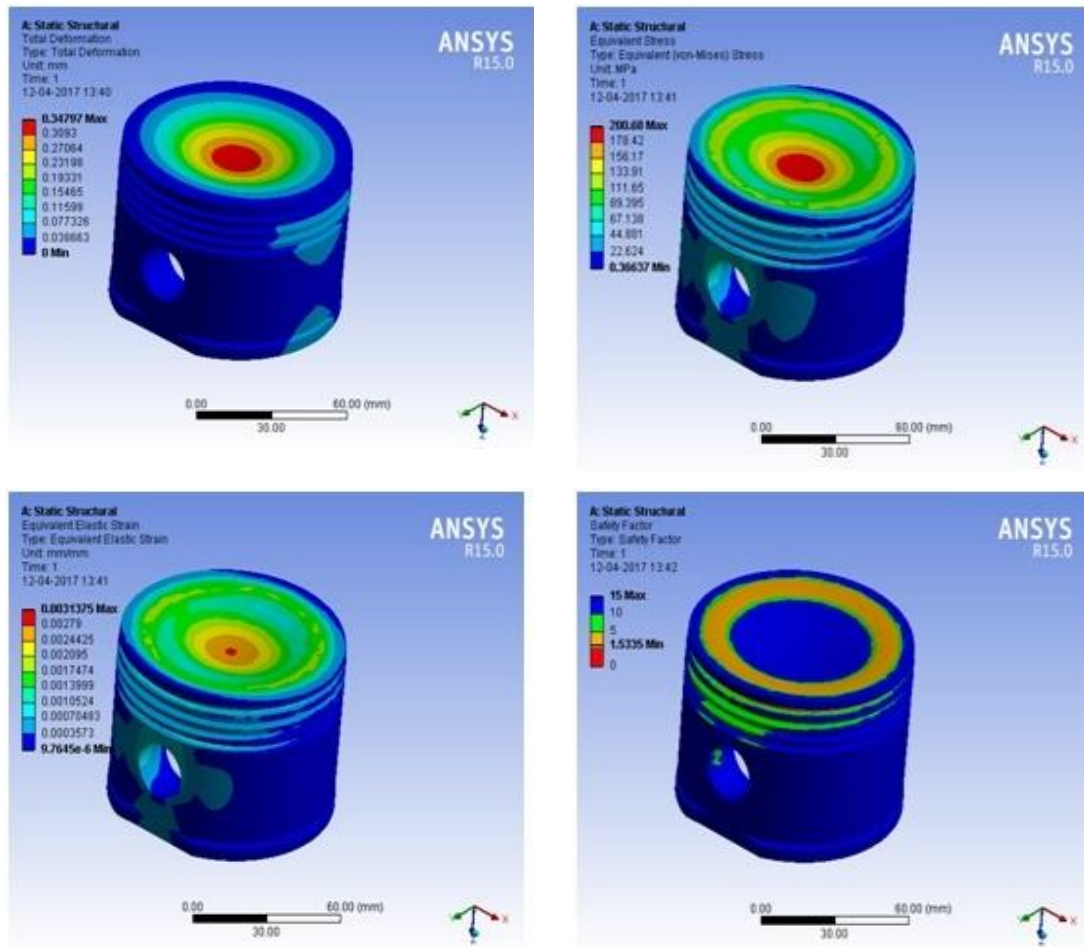
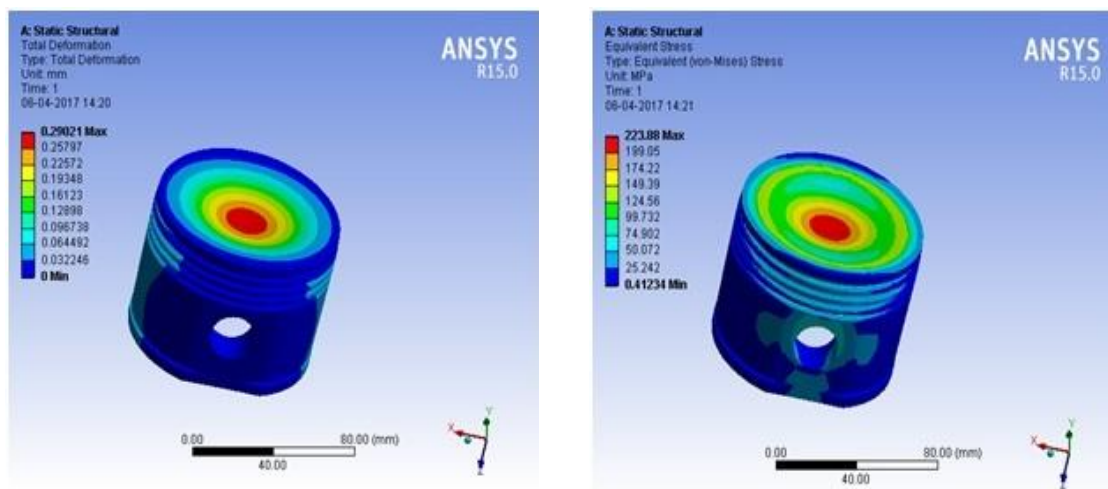


Fig.5. Structural analysis of Aluminium Alloy Material



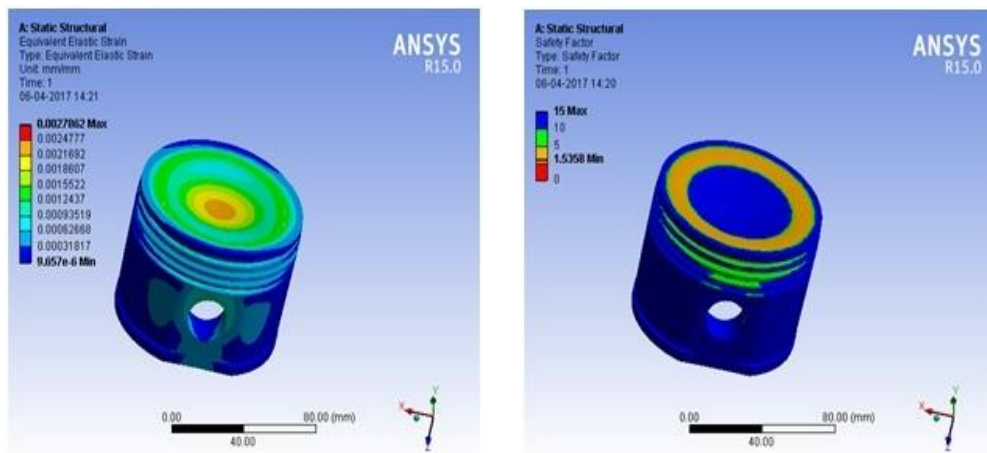


Fig.6. Structural analysis of Aluminium Alloy with  $ZrO_2$  Material

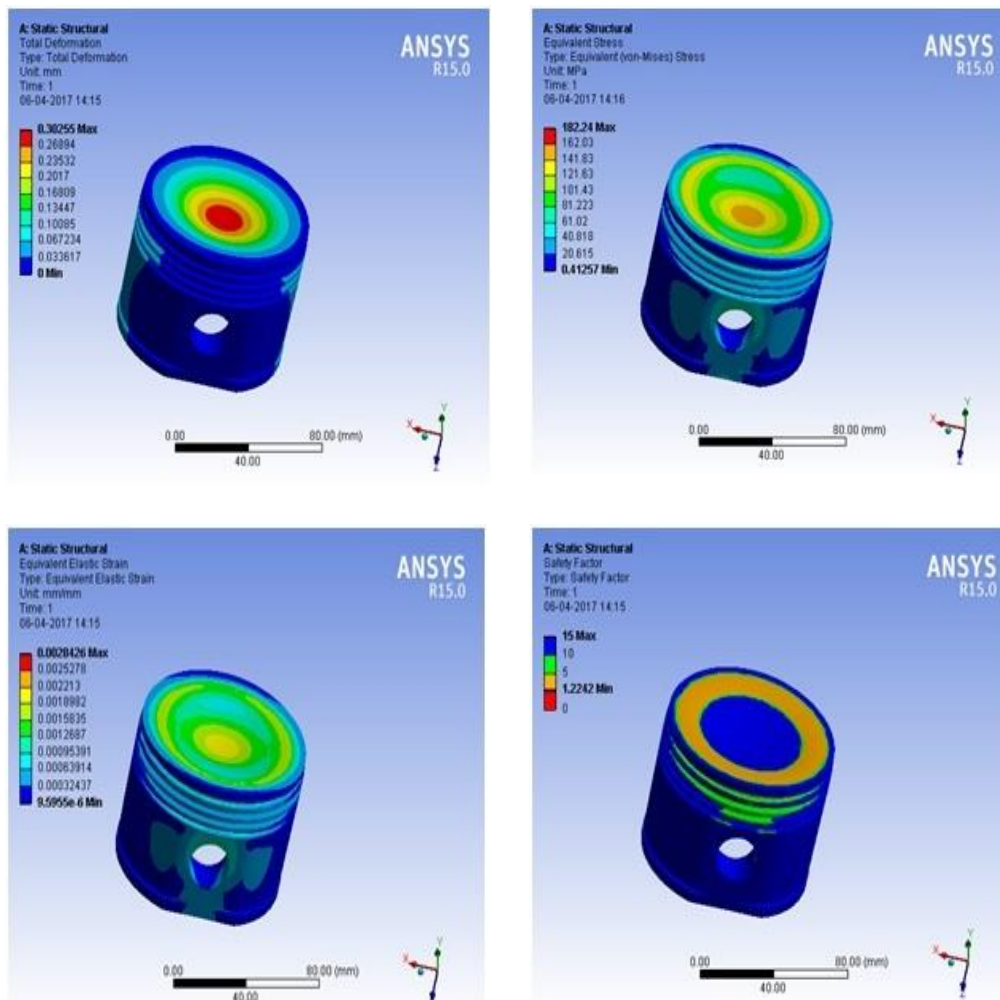


Fig.7. Structural analysis of Aluminium Alloy with  $SiO_2$  Material



#### IV. RESULTS AND CONCLUSION

Using ANSYS software the structural analysis of aluminium alloy coated with  $ZrO_2$  and  $SiO_2$  has been carried out as shown in table.

| Aluminium Alloy Coated with Ceramic Material |                  |              |           |               |
|----------------------------------------------|------------------|--------------|-----------|---------------|
| Material                                     | Deformation (mm) | Stress (MPa) | Strain    | Safety Factor |
| Al-alloy                                     | 0.34797          | 200.68       | 0.0031375 | 1.5335        |
| Al- $ZrO_2$                                  | 0.29021          | 223.88       | 0.0027862 | 1.5358        |
| Al- $SiO_2$                                  | 0.30255          | 182.24       | 0.0028426 | 1.2242        |

Table.2. Structural Analysis of Aluminium Alloy

From the above table Deformation, Stress, Strain and Safety Factor were analyzed. It is observed that the values of Stress and Safety Factor are lower in Al- $SiO_2$  and higher in Al- $ZrO_2$  as compare to Aluminium Alloy.

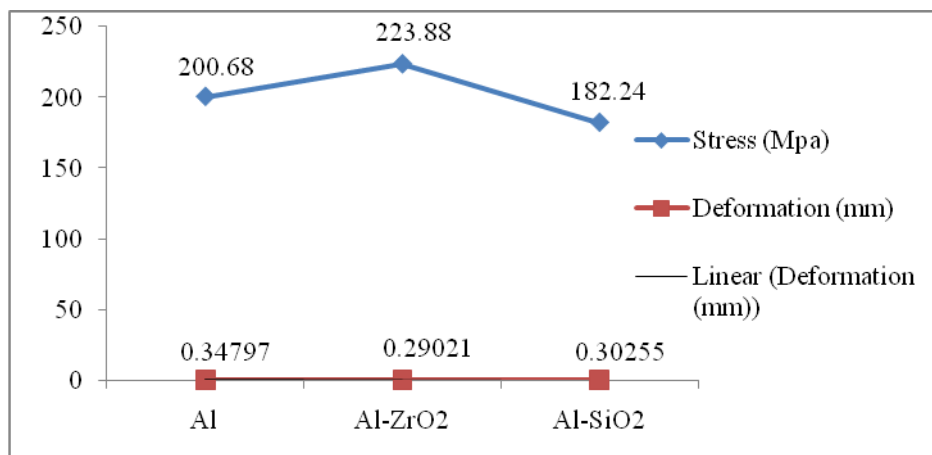


Fig.8. Material Vs Stress and Deformation

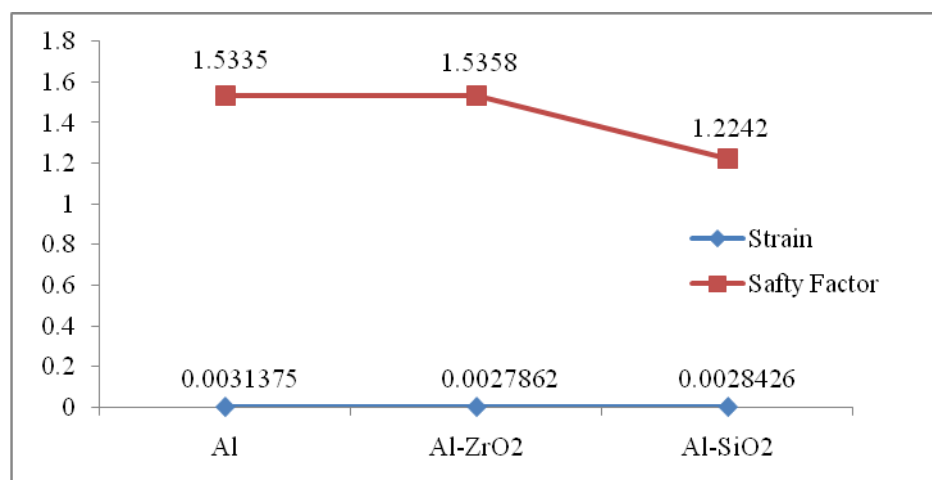


Fig.9. Material Vs Strain and Safety Factor

From the above graph it is observed that the stress is higher in A1-ZrO<sub>2</sub> and lower in A1-SiO<sub>2</sub>. Safety Factor is higher in Aluminium Alloy and lower in Al-SiO<sub>2</sub>, Strain and Deformations in A1-ZrO<sub>2</sub> and A1-SiO<sub>2</sub> are closer to the Aluminium Alloy.

## **V. CONCLUSIONS**

- In this work a 3D model Piston has been designed, developed and analyzed.
- In static conditions when we applied 6Mpa pressure, on existing piston (Aluminium Alloy) produced 200.68MPa by changing design and by coated with SiO<sub>2</sub> is reduced to 182.24 Mpa and coated with ZrO<sub>2</sub> increases to 223.88 MPa.
- 18.44 Mpa Stress has been reduced by coated with SiO<sub>2</sub> on surface of piston.
- Strain and Deformations in A1-ZrO<sub>2</sub> and A1-SiO<sub>2</sub> are closer to the Aluminium Alloy.
- We conclude that the Aluminium Alloy coated with SiO<sub>2</sub> will satisfy the static conditions and it increases the piston efficiency.

## **VI. REFERENCES**

- [1]. Nagarjuna.Jana, K.Komali “Design and Analysis on a Ceramic Coated Diesel Engine Piston using ANSYS” (IJSETR)- ISSN 2319-8885 Vol.04(1), 2015, pp.0016-0019
- [2]. Vinod Kumar Yadav, Yogesh Mishra “Design and Structural Analysis of Ceramic Coated Petrol Engine Piston Using Finite Element Method” Int. J. Innovative Research in Science, Engineering and Technology, Vol. 4(6), 2015.
- [3]. S.Sathyamoorthi, M.Prabhakaran, S.A.Muhammed Abraar “Numerical investigation of ceramic coating on piston crown using Finite Element Analysis” International Journal of Scientific Engineering and Applied Science (IJSEAS) – Vol.2(4), 2016,pp.2395-3470
- [4]. Narsaiyolla Naresh, (M.Tech), P.Sampath Rao, M.Tech,(PhD)“Structural Analysis of a Ceramic Coated Diesel Engine Piston Using Finite Element Method” SSRG International Journal of Mechanical Engineering, Vol.1(5).
- [5]. R.Silambarasan, S.Balakrishnan , A.Selvarasu have written a paper on “Design and thermal analysis of partial ceramic coated piston of spark ignition (SI) Engine” International Advanced Research Journal in Science, Engineering and Technology, Vol. 2(4)..
- [6]. Ravinder Reddy Pinninti have written a paper on “Temperature and Stress Analysis of Ceramic Coated Sic-Al Alloy Piston Used in a Diesel Engine Using FEA” International Journal of Innovative Research in Science, Engineering and Technology, Vol. 4(8),2007.
- [7]. Telkar Mahesh1 Sunil Kumar2 V.Vinay3 P.Saisrikanth Goud4 have written a paper on “Temperature and Thermal Stress Analyses of a Ceramic-Coated Aluminium Alloy Piston in a Diesel Engine” IJSRD || National Conference on Recent Trends & Innovations in Mechanical Engineering || April 2016, pp.2321-0613.

- [8]. Ravinder Reddy P., Ramamurthy G., “Computer Aided Analysis of Thermally Air Gap Insulated Pistons made of Composites”, National Conference on Machines and Mechanisms (NACOMM-95), Jan 20-21, 1995, pp. 177-180, CMERI, Durgapur.
- [9]. K. BalaShowry, A.V.S. Raju, P. Ravinder Reddy, “Multi-Dimensional Modeling of Direct Injection Diesel Engine and Effects of Split Injection”, International Journal of Scientific and Research Publications, Vol. 2(1), 2012, pp. 1-8.
- [10]. Pradeep Halder, Edla Franklin, Dr. P. Ravinder Reddy, “Combustion and Mixing Analysis of a Scramjet Combustor Using CFD”, International Journal for Scientific Research & Development (IJSRD), Vol. 2(9), 2014, pp.27-33.
- [11]. Dr. K. BalaShowry, Dr. P. Ravinder Reddy, “Reducing Particulate and NOX Emissions by Using Split Injection”, International Journal of Science and Research, Vol. 4(3),2015.
- [12]. T.M. Yonushonis, “Overview of thermal barrier coatings in diesel engines”, J. Therm. Spray Technol. Vol. 6, 1997, pp.50-56.
- [13]. M. Cerit, “Thermo mechanical analysis of a partially ceramic coated piston used in an SI Engine”, Surf. Coat. Technol, Vol. 205, 2011, pp.3499-3505.
- [14]. E. Buyukkaya, “Thermal analysis of functionally graded coating AlSi alloy and steel pistons”, Surf. Coat. Technol. Vol. 202,2008, pp.3856-3865.
- [15]. E. Buyukkaya, M. Cerit, “Thermal analysis of a ceramic coating diesel engine piston using 3D finite element method”, Surf. Coat. Technol. Vol. 202, 2007, pp.398-402.
- [16]. H.W. Ng, Z. Gan, “A finite element analysis technique for predicting as-sprayed residual stresses generated by the plasma spray coating process”, Finite Elem. Anal. Des. Vol. 41, 2005, pp.1235-1254.
- [17]. E. Buyukkaya, A.S, Demirkiran, M. Cerit, “Application of thermal barrier coating in a diesel engine”, Key Eng. Mater. 264e268 ,517e520,2004
- [18]. E. Buyukkaya,M. Cerit, “Experimental study of NOx emissions and injection timing of a low heat rejection diesel engine”, Int. J. Therm. Sci. Vol. 47,2008, pp.1096-1106.
- [19]. A. Parlak, V. Ayhan, “Effect of using a piston with a thermal barrier layer in a spark ignition engine”, J. Energy Inst. Vol. 80, 2007, pp. 223-228.
- [20]. E. Buyukkaya, T. Engin, M. Cerit, “Effects of thermal barrier coating on gas emissions and performance of a LHR engine with different injection timings and valve adjustments”, Energy Conv. Manage. Vol. 47, 2006, pp. 1298-1310.
- [21]. M. Cerit, V. Ayhan, A. Parlak, H. Yasar, “Thermal analysis of a partially ceramic coated piston: effect on cold start HC emission in a spark ignition engine”, Appl. Therm. Eng. Vol. 31 (3), 2011, pp.336-341.