

INVESTIGATION OF GROUNDWATER POTENTIAL ZONES USING RS & GIS IN WESTERN PART OF KRISHNAGIRI DISTRICT

Rajkamal U¹, Kiruthika A.M² and S. Suresh Babu³

¹Student, Department of Civil Engineering, Adhiyamaan College of Engineering, Hosur-635109

²Assistant Professor of Civil Engineering, ³Professor & Head of Department of Civil Engineering, Adhiyamaan College of Engineering, Hosur-635109, Tamil Nadu, (India)

ABSTRACT

Urbanization and ground water potential are interrelated feature in a landscape. With the help of powerful technology comprising of RS (Remote Sensing), GIS (Geographic Information System) and GPS (Global Positioning System) are of great significance in identifying ground water potential. The aim of the present study is to delineate the groundwater potential zone in Western part of Krishnagiri district. The thematic layers considered in present study are Geomorphology, Land slope, Land use, Drainage density, Soil which were prepared using the IRS LISS IV, Topographical sheet and some other conventional data. All these themes and their individual features are then assigned weights according to their relative importance in groundwater occurrence. GIS modeling technique has been used to produce groundwater potential map. The thematic layers finally generated are integrated using ARCGIS software to yield a groundwater potential zone map of the study area. Thus, four different groundwater potential zones have been identified, namely 'Very high', 'High', 'Moderate' and 'Low'.

Keywords: ArcGIS, GIS, GPS, Remote Sensing

I INTRODUCTION

In the world scenario, the availability of groundwater is reducing gradually due to over exploitation, and the lack of groundwater management. At present, the worldwide problem is the lack of fresh groundwater resource. Hence, it is necessary to understand the methods and way to approach towards groundwater potential zones and surface water conservation and to improve the groundwater level at the national, regional, and local scale for sustainable livelihood. Groundwater is one of the virtual water resources of planet earth that has been mainly replenished by surface water sources like rivers, lakes, ponds, and by surface and subsurface runoff. Since the eighteenth century onwards, groundwater storage structures like ponds, canals, and reservoirs have been used to store surface water all over India, but it is neither fully scientific nor geographic location based.

In order to circumvent these issues in identifying the groundwater zones, the recent geospatial technologies like remote sensing and GIS could be used with relatively accurate results. It is also possible to demarcate the high potential sites for artificial recharge in both accessible and inaccessible areas. The specific details of water resource systems including drainage pattern, stream order, water storage structures, and their associated

geographical features should be incorporated to get credible conclusions for the relative benefits and alternative management policies [4]. The hydrologic processes are highly interactive between the vadose zone and groundwater under shallow water table conditions. GIS has been widely used in studies related to pollution, terrain modeling, and groundwater prospecting ([5][6][8][9]). Recent development in remote sensing and GIS techniques allow mapping the spatial distribution of groundwater level and its quality ([2][13][11][12]). The results of downscaling analysis of the water resource system and climate change and production of reservoir inflows using statistical method produced significant output for extreme management of water resources.

Relevant studies on groundwater potential using GIS and numerical modeling have been carried out by different researchers throughout the world ([1][14]). However, studies on application of GIS merged with analytical hierarchical process (AHP) in demarcating groundwater potential zones are carried out by few.

AHP technique analyzes the multiple datasets in a pair-wise comparison matrix, which is used to calculate the geometric mean and normalized weight of parameters. However, Machiwal et al. [7] have used five parameters in AHP process in their study for the identification of groundwater potential zone but in our study, we have used seven parameters for better results. The evaluation of the spatial parameters such as geological structure, geomorphic features and hydrological characteristics, among them geomorphology, slope and geology of the area have a great role to identify the groundwater zone from the surface runoff.

II STUDY AREA

Krishnagiri is a district in the state of Tamil Nadu, India. The municipal town of Krishnagiri is the district headquarters. The study area covers two taluks namely- Hosur and Denkanikottai. The area lies between 12 15' 45" N & 12 46' 20" N Latitudes and 77 47' 2.4" & 77 53' 20" E Longitudes. The transportation network is one of the advantages for the development of the District. The prominent geomorphic units identified in the district through interpretation of satellite imagery are structural hills in the southwestern part of the district, denudational land forms like buried pediments in the plains and inselbergs and plateaus represented by conical hills aligned with major lineaments.

Soils have been classified into Black soil, mixed soil, red loamy soil, gravelly and sandy soils. Red loamy and sandy soils are predominant in Hosur taluk. The district receives the rain under the influence of both southwest and northeast monsoons. The normal annual rainfall over the district varies from about 750 to about 900 mm. It is the minimum around Hosur and Rayakottai in the northern and central parts of the district. It gradually increases towards west and east and is the maximum around Denkanikottai in the western part.

III MATERIALS AND METHODS

The multiple parameter analysis for delineating the groundwater potential zones in the study area has been done by GIS-based AHP technique. In this study, 7 spatial parameters such as geology, geomorphology, slope, land use and land cover, NDVI, drainage density and rainfall are analyzed by AHP approach including geometric mean and normalized weight calculation to explore the potential zone for groundwater.

3.1 Data collection and preparation of geospatial database

Seven spatial parameters have been used for geospatial database preparation. Using GIS tool, the thematic layers namely geology, geomorphology, slope, land use and land cover, lineament density, drainage density and rainfall were prepared from the above data sources and projected with UTM–WGS 84 projection and coordinate system. The geological thematic layer was prepared from the published map of Geological Survey of India using digitizing technique in ArcGIS environment.

3.2 Methodology

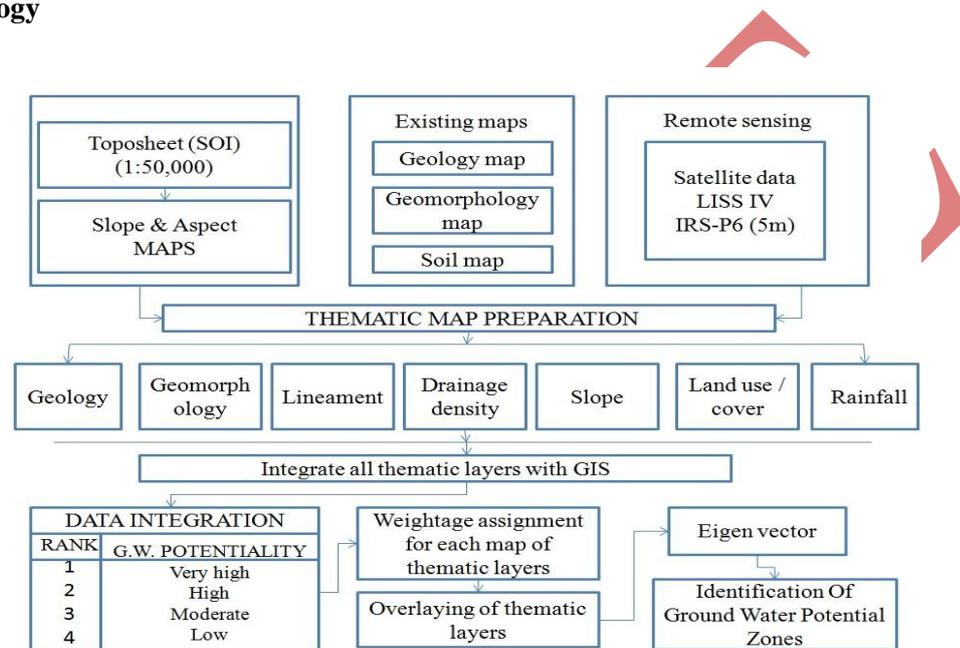


Fig 2: Flow of Work

3.2.1 Analytical hierarchical process

AHP is used to demarcate the potential groundwater zones and this technique was proposed by Saaty [10]. The AHP method allows assessing the geometric mean (Eq. 1), followed by allotting a normalized weight (Eq. 2) to various parameters for finalizing the decision process. In this study, the AHP pair-wise matrix was developed by input values of scale weights of parameters based on direct or indirect relationship. If a parameter has direct influence towards groundwater potential, then the score was assigned as 1 and for indirect influence the assigned score is 0.5.

3.2.2 Geometric mean

In the first step of AHP analysis, the parameters were rated based on a defined score (0.5–1 scale) for calculating the geometric mean. The geometric mean is derived from the total sum of score of a specific parameter known as total scale weight divided by total number of parameter; this is expressed as:

$$\text{Geometric mean} = \frac{\text{Total Scale Weight}}{\text{Total number of parameters}} \quad (1)$$

3.2.3 Normalized weight

The normalized weight is an indicator of multi-parameter analysis for groundwater potential. In the second step of AHP analysis, the normalized weight was derived from the assigned weight of a parameter feature class divided by the corresponding geometric mean. The formula is represented as:

$$\text{Normalized weight} = \frac{\text{Assigned weight of a parameter}}{\text{Geometric mean}} \quad (2)$$

The normalized weighted map is an indicator of potential groundwater zone that was classified into five classes as very high, high, moderate, low, and unsuitable zone. The class with maximum weight is considered as very high suitable zone and least weighted class is less or unsuitable zone for groundwater.

IV RESULTS AND DISCUSSION

The potential zones for groundwater were explored by analyzing the different parameters such as geology, geomorphology, slope, land use and land cover, NDVI, drainage density and rainfall through integrated AHP method and geospatial technology.

| Theme | GM | GG | SLOPE | SOIL | LU/LC | NDVI | RF | DD | Geometric Mean | Normalized Weight |
|----------------|-----|-----|-------|------|-------|------|-----|-----|----------------|-------------------|
| GM | 1 | 9/8 | 9/7 | 9/4 | 9/3 | 9/1 | 9/5 | 9/5 | 2.026 | 0.214 |
| GG | 8/9 | 1 | 8/7 | 8/4 | 8/3 | 8/1 | 8/5 | 8/5 | 1.801 | 0.190 |
| SOIL | 7/9 | 7/8 | 1 | 7/4 | 7/3 | 7/1 | 7/5 | 7/5 | 1.576 | 1.667 |
| SLOPE | 4/9 | 4/8 | 4/7 | 1 | 4/3 | 4/1 | 4/5 | 4/5 | 0.900 | 0.095 |
| LU/LC | 3/9 | 3/8 | 3/7 | 3/4 | 1 | 3/1 | 3/5 | 3/5 | 0.675 | 0.071 |
| NDVI | 1/9 | 1/8 | 1/7 | 1/4 | 1/3 | 1 | 1/5 | 1/5 | 0.225 | 0.023 |
| RF | 5/9 | 5/8 | 5/7 | 5/4 | 5/3 | 5/1 | 1 | 1 | 1.125 | 0.119 |
| DD | 5/9 | 5/8 | 5/7 | 5/4 | 5/3 | 5/1 | 1 | 1 | 1.125 | 0.119 |
| Column Total = | | | | | | | | | 9.453 | 0.997 |

Table 1: Weight age Given to Various Factors

Every class in the thematic layers was placed into one of the following categories viz. (i) Good (ii) Good-Moderate (iii) Moderate (iv) Moderate-Poor (v) Poor. Considering their behavior with respect to groundwater control, the different classes are given suitable values, according to their importance relative to other classes.

Slope

The slope map has been prepared using contours produced from SOI Topographical data and in relation to groundwater flat areas where the slope is low are capable of holding rainfall, which in turn facilitates recharge whereas in elevated areas where the slope is high, there will be high run-off and low infiltration as shown in Fig 3.

The slope derived has shown that elevation is low in northern and central part of the study area. The high slopes were found in the southern part ranges from 64% to 83% as shown in Fig 4.

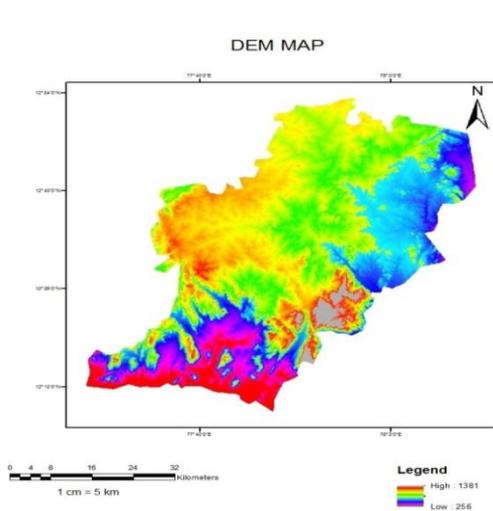


Fig 3: Digital Elevation Map

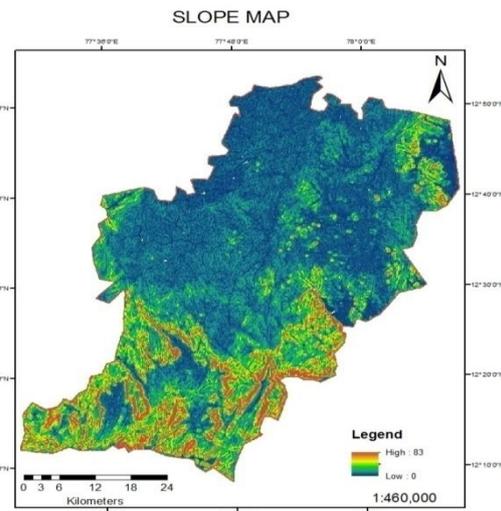


Fig 4: Slope Map

NDVI

NDVI map is shown in fig 5. The results from the map show that higher impact of vegetation is available in the south-east region and normal vegetation in the western and SW regions. Parts of Hosur taluk have normal vegetation.

Landuse and landcover

Landuse and landcover map was prepared using geocoded IRS LISS IV data and was visually interpreted based on classification system. Landuse and landcover map is depicted in Fig. 6. One of the parameters that influence the occurrence of sub-surface groundwater occurrence is the present condition of landcover and landuse of the area. The effect of landuse/landcover is manifested either by reducing runoff and facilitating, or by trapping water on their leaf.

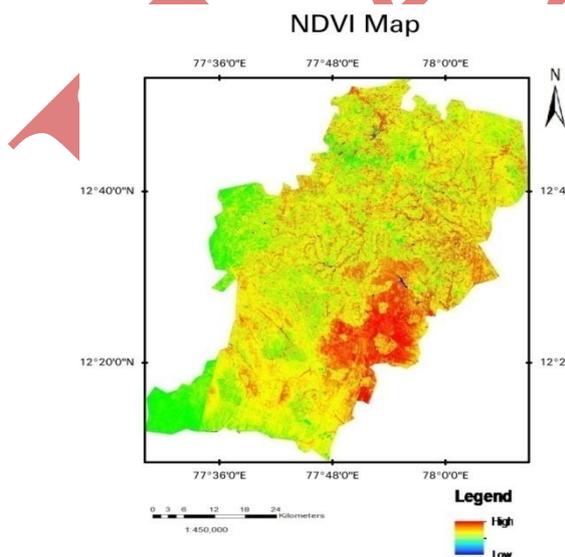


Fig 5: NDVI Map

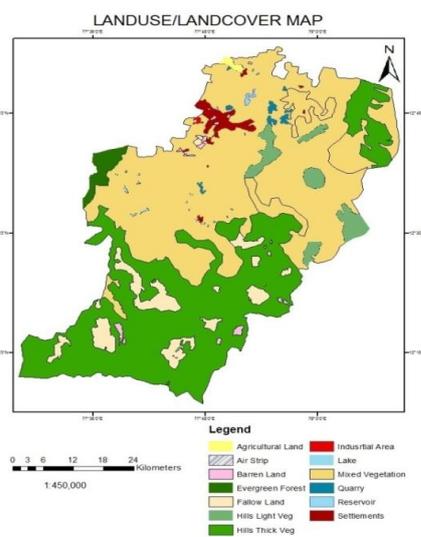


Fig 6: Landuse/landcover map

Aspect

The aspect map is shown in the fig 7. Aspect gives the knowledge of low lying steep slopes along the east direction and the steep slopes in the southern region. Due to the slope, runoff will be more in steep slopes.

Drainage Density

The drainage network of the project area was derived from on screen digitization from topographic map; also the drainage is denser in southern part. Comparison of the drainage system of the area and structure has shown that the drainage system of the area is structurally controlled following lineaments directions. Dendritic and parallel drainage pattern are recognized, which are indicative of the presence of structures that act as conduits or storage for sub-surface water as shown in Fig 8..

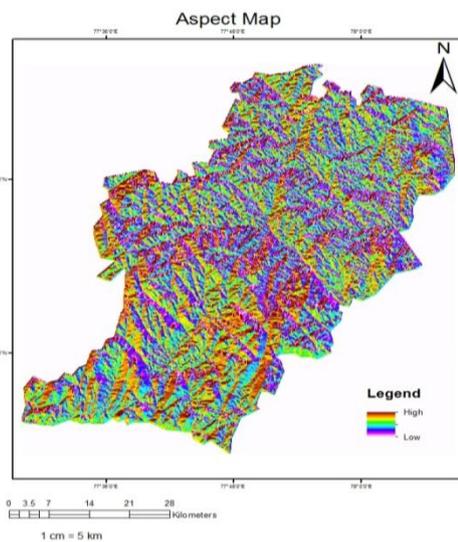


Fig 7: Aspect Map

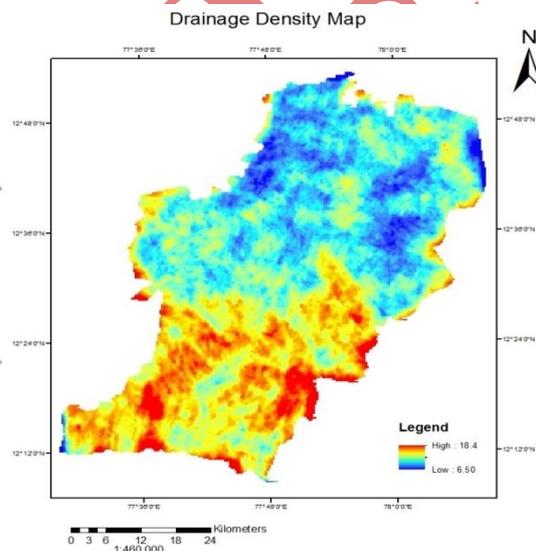


Fig 8: Drainage Density Map

Soil

The Soil type ranges from fine loamy, loamy, clayey soils are seen in the study area. Black and loam soil are found in Krishnagiri district. The Soil map is shown in Fig. 9. Soil is one of the significant control factors to determine the infiltration rate of an area. Silt clay loam and sandy clay loam soils are calcareous in nature and they originated from the parent materials of calcium carbonate rocks, whereas loamy sand and loamy fine sand are non-calcareous derived from acid rock materials. The areas which have coarse granule, coarse sandy loam, and loamy sand are generally high potential of groundwater infiltration.

Geomorphology

The geomorphologic characteristics are broadly classified into pediments, structural hill, flood plain, shallow pediments upper undulating alluvial plains and Water body mask. The geomorphology map is shown in Fig 10. Floodplain deposits occur mainly along the stream channels in the eastern part of the study area and comprise chiefly poorly sorted to well-sorted clay, silty clay, loam, clayey silt and silt containing scattered granules and pebbles along with moderately to well-stratified loam, sandy loam or fine sand.

Geology

The geological settings of the study area are underlain by sedimentary rocks namely charnockite, Granitoid gneiss, feldspar gneiss, calcareous gritty (sand stone mixed clay), and quartz vein. Granitoid gneiss is a composition of primary lateritic capping, basement crystalline complex, and conglomerate, which are found along the middle part of the river valley. The younger alluvium formations are seen predominantly in the northern part of the study area and are considered as highly permeable. Besides that, the northwest and middle-east part of the study area consist of fluvial–deltaic sediment deposits, which are laid on Granitoid gneiss and are considered as good zone for groundwater potential. However, the hard rock materials composed of crystalline charnockite, conglomerate, and quartzite vein present in the southern part of the study area are not suitable for groundwater potential zones. The geology map is shown in the fig. 11.

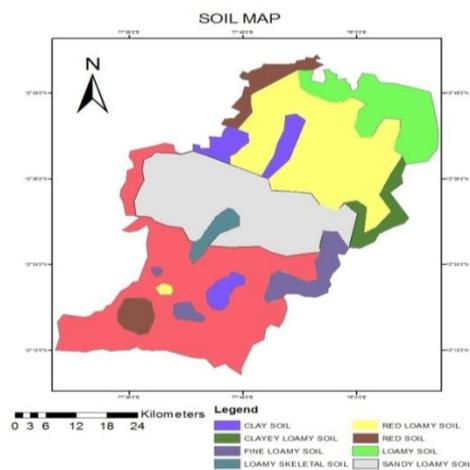


Fig 9: Soil Map

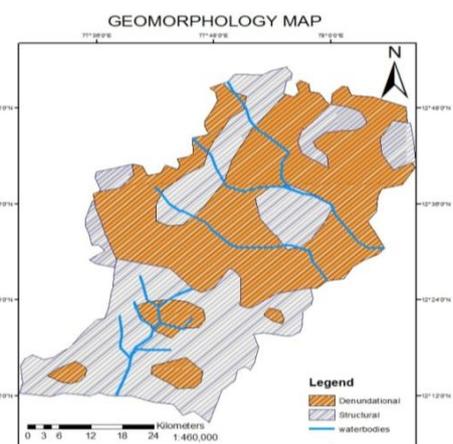


Fig 10: Geomorphology Map

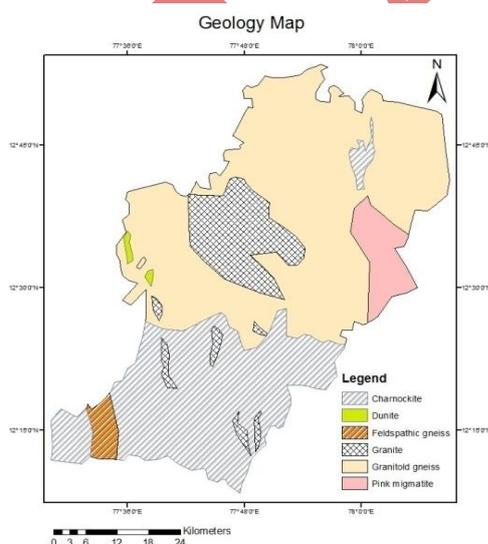


Fig 11: Geology Map

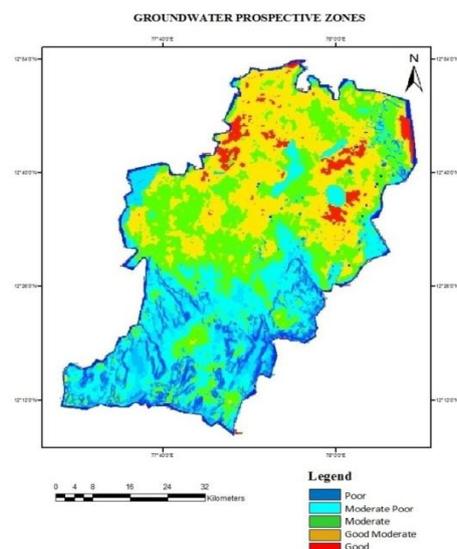


Fig 12: Groundwater potential zones of the study area

The map produced has shown that the groundwater potential of the project area is related mainly to lineaments, geology and slope. The groundwater potential zones were identified in the northern part of the study area. Hosur and its surrounding region is having good and average potential of groundwater respectively. So as Hosur, Parts of Shoolagiri and Bagalur also have good potential zone. The hilly regions have the poor groundwater potential zones because of the higher slopes and lower infiltration rate of soils.

Data validation

The potential groundwater zone for the study area is shown in Fig 12. It is clearly observed that high potential zones are located in the northwestern part of the study area. Spatially the very good and good categories are distributed along areas near to lineaments and less drainage density and where the lithology is affected by secondary structure and having interconnected pore spaces. This highlights importance of lineaments, geology and hydro-geomorphological parameters in the project area. Areas with moderate groundwater prospects are attributed to contributions from combinations of the land use/cover, lithology, slope and landform. The low to poor categories of groundwater potential zones are spatially distributed mainly along ridges where slope class is very high, the lithology is compact/massive and far from lineaments. A cross-validation study has been carried out in this part to ensure the potential zones of groundwater as per field data published by CGWB [3].

V CONCLUSION

The application of integrated geospatial technology and AHP has proven to be a better tool for the identification of potential groundwater zones in western part of Krishnagiri. The present study demarcates the potential zones for groundwater by analyzing the influencing factors. The multi-parametric approach using RS, GIS and AHP techniques can greatly minimize the time, labor and money and thereby enable quick decision-making for efficient water resources management. Despite the inherent limitations of multi-criteria analysis, it is a valuable practical tool for the areas/regions (especially developing nations) where data scarcity (in terms of quantity and quality) is often an obstacle for solving real-world water problems.

REFERENCES

- [1] Appleyard S. J. (1995). The impact of urban development on recharge and groundwater quality in the coastal aquifer near Perth, Western Australia. *Hydrogeol J* 3(2):65–75
- [2] Brunner P, Bauer P, Eugster M, Kinzelbach W (2004). Using remote sensing to regionalize local precipitation recharge rates obtained from the chloride method. *J Hydrol* 294(4):241–250
- [3] CGWB (2010). Groundwater year book of Tamil Nadu and UT of Puducherry. Technical report series. SECR.GWY/TN/10-11/22
- [4] Georgakakos KP, Graham NE (2008). Potential benefits of seasonal inflow prediction uncertainty for reservoir release decisions. *J Appl Meteorol Climatol* 47(5):1297–1321
- [5] Georgakakos KP, Graham NE, Cheng FY, Spencer C, Shamir E et al (2011). Value of adaptive water resources management in northern California under climatic variability and change: dynamic hydroclimatology. *J Hydrol*. doi:10.1016/j.jhydrol.2011.04.032

- [6] John Wilson JS, Chandrasekar N, Magesh NS (2012). Morphometric analysis of major sub-watersheds in Aiyar and Karai Pottanar Basin, Central Tamil Nadu, India using remote sensing and GIS techniques. *Bonfring International Journal of Industrial Engineering & Management Science* 2(1):8–15
- [7] Machiwal D, Jha MK, Mal BC (2011). Assessment of groundwater potential in a semi-arid region of India using remote sensing, GIS and MCDM techniques. *Water Resour Manag* 25(5):1359–1386
- [8] Magesh NS, Chandrasekar N, Soundranayagam JP (2011a). Morphometric evaluation of Papanasam and Manimuthar watersheds, parts of Western Ghats, Tirunelveli district, Tamil Nadu, India: a GIS approach. *Environ Earth Sci* 64:373–381
- [9] Magesh NS, Jitheshlal KV, Chandrasekar N, Jini KV (2012b). GIS based morphometric evaluation of Chimmini and Mupily watersheds, parts of Western Ghats, Thrissur District, Kerala, India. *Earth Sci Inform* 5(2):111–121
- [10] Saaty TL (1990). Remarks on the analytic hierarchy process. *Manag Sci* 36:259–268 *Arab J Geoscience*
- [11] Sankar K (2002). Evaluation of groundwater potential zones using remote sensing data in Upper Vaigai river basin, Tamil Nadu, India. *J Indian Soc Remote Sens* 30(3):119–129
- [12] Srivastava PK, Bhattacharya AK (2006). Groundwater assessment through an integrated approach using remote sensing, GIS and resistivity techniques: a case study from a hard rock terrain. *Int J Rem Sen* 27(20):4599–4620
- [13] Tweed S, Leblanc M, Webb J, Lubczynski M (2007). RS and GIS for mapping groundwater recharge and discharge areas in salinity prone catchments, southeastern Australia. *Hydrogeol J* 15(1):75–96
- [14] Youssef MA, Pradhan B, Tarabees E (2010). Integrated evaluation of urban development suitability based on remote sensing and GIS techniques: contribution from the analytic hierarchy process. *Arab J Geosci* 4:463–473