

A COMPARATIVE STUDY OF BIS AND BS (DOE) METHOD OF CONCRETE MIX DESIGN USING ALCCOFINE AS A PARTIAL REPLACEMENT OF CEMENT”

Mr.Nitesh Kumar chandel¹, Mr.Rohit Sahu², Mr Dr. Pankaj Singh³

*¹Student - M.Tech (Structural Engineering) Department of Civil Engineering,
RKDF Institute of science and Technology Bhopal, M.P., India*

*^{2,3}Assistant Professor- Department of Civil Engineering, RKDF Institute of science and Technology
Bhopal, M.P., India*

ABSTRACT

This paper presents a comparison of BIS, and DOE methods of concrete mix design, combining the test results of these methods. The M40 and M50 grades of concrete have been designed for comparison using alccofine. In this project we replaced the cement by varying percentage of alccofine ranging from 0%, 10%, 15% and 20% by weight and MASTER POLYHEED 8632 as admixtures and British code, American concrete institute method, and Indian standard method is used to design and comparison of results..In this paper the results found that the at 10% the strength will be maximum after that the strength decreases.ACI method gives more strength than BIS method.

Keywords- Bureau of Indian Standard, Department of Environment method, Alccofine, Mater polyheed, Admixtures

I. INTRODUCTION

In all over the world the use of concrete is increases day by day .Therefore the uses of high strength and uses in high rise building and multistory building. Master Polyheed is a type of polycarboxylic ether and it is economical type .this product is developed for making application in ready mix concrete. It reduces the water and also maintains the set of retardation. it is free from chlorine and it contains low alkaline. it is good with all types of cement.

This paper investigates the use of alccofine as partial replacement of PPC in M-40 and M-50 grade of concrete. The percentage replacement of PPC by alccofine was 0%, 10%, 15% and 20%. The test specimens (cubes) casted and tested as per relevant IS code of practice British code and Department of environment method for 7 and 28 days compressive strength.

II. LITERATURE REVIEW

- **As per Siddharth P. Upadhyay** “-studied that the Compressive strength of high performance concrete with the replacement of cement with Alccofine and Fly ash, and also with natural sand to manufactured sand The concrete specimens were cured on normal moist curing under normal atmospheric temperature. The compressive strength was determined at 3, 7 and 28 days. The addition of Alccofine shows an early strength gaining property and that of Fly- ash shows long term strength. The ternary system that is Ordinary Portland cement-fly ash-Alccofine concrete was found to increase the compressive strength of concrete on all ages when compared to concrete made with fly ash and Alccofine alone.
- **As per Sharandeep singh** studied that a comparison of DOE, ACI, BIS and USBR methods of concrete mix design, combining the test results of these methods. . M35 and M40 grades of concrete were used to carry out the comparison based on the mechanical properties of concrete. The observations showed that all the methods achieved the target mean strength either, in case of M40 or M35 except the ACI method in case of M40 for which the cement content has to be raised by an amount of 15 kg/m³, to fulfill the minimum requirements of compressive strength. Nevertheless, the USBR method attained the highest compressive strength either at 7 days or after 28 days, which was 123.31% of the target strength required. Whereas, the outcomes obtained by BIS and DOE method cannot be overlooked. The USBR method attained maximum flexure strength for M35 grade, whereas, BIS achieved highest values of flexure for M40 grade
- **As per Saurabh Gupta**“studied that Effect on compressive strength of high performance concrete incorporating alccofine and fly ash” the Compressive strength of high performance concrete with the replacement of cement with Alccofine and Fly ash, and also with natural sand to manufactured sand. The compressive strength was determined at 3, 7 and 28 days. The addition of Alccofine shows an early strength gaining property and that of Fly- ash shows long term strength. The ternary system that is Ordinary Portland cement-fly ash-Alccofine concrete was found to increase the compressive strength of concrete on all age when compared to concrete made with fly ash and Alccofine alone.
- **As per M.S. Pawar** “ Studied that the comparison of the properties of self compacting concrete with fly ash and Alccofine to that of standard one. With fly ash The main variable is proportion of Alccofine keeping cement, fly ash, water, coarse aggregate, fine aggregate and super plasticizer contents constant The addition of Alccofine in SCC mixes increases the self compatibility characteristic like filling ability, passing ability and .resistance to segregation. Fresh Properties and harden Properties of SCCs with 10% Alccofine are superior than SCCs with 15% of Alccofine.
- **AS per Deepa A. Sinha** Concrete mix design is the process of choosing suitable ingredient of concrete and determining their relative quantities with the object of producing as economically as possible concrete of certain minimum properties, notable workability, strength and durability. It should be explained that an exact determination of mix proportions by means of table or computer data is generally not possible. The main objective of the study was to design M25 concrete mix and find the compressive strength using different mix design methods like IS10262-1982, IS 10262-2009, ACI method and DOE method. We conclude that in above

four methods minimum cement content used in DOE methods and it gives desire compressive strength of concrete economical way .

III EXPERIMENTAL INVESTIGATION

- [1] **Materials Cement:-** In this experimental investigation Portland pozzolana cement was used.
- [2] **Fine Aggregates:-**The fine aggregates used in this investigation was Natural River sand passing through 4.75 mm sieve with specific gravity of 2.61. The percentage of passing is within the limits as Indian Standard Specification. The fine aggregate corresponds to the zone II gradation as per IS 383:1970.
- [3] **Coarse Aggregates:-** Normal crushed broken stone aggregate angular in shape was used as coarse aggregates. Only one fraction of coarse aggregates were used, 20mm size having specific gravity of 2.64.
- [4] **Alccofine:-** Alccofine has unique properties to enhance the 'performance of concrete' in fresh and hardened stages due to its much finer particle size. Alccofine is manufactured by some controlled conditions with special technique to produce micro fine size. Alccofine is generally two types one is low calcium silicate which is Alccofine 1203 and other is high calcium silicate which is Alccofine 1101.
- [5] **Water:-**Ordinary tape water clean, potable free from suspended particles and chemical substance was used for both mixing and curing of concrete.
- [6] **Master Polyheed 8632:-** Master polyheed is a type of polycarboxylic ether and it is economical type .this product is developed for making application in ready mix concrete. It reduces the water and also maintains the set of retardation. it is free from chlorine and it contains low alkaline. it is good with all types of cement.

TABLE 1: CONSTITUENTS OF DIFFERENT MIXES FOR M-40 GRADE, ACCORDING TO IS METHOD

Mixes	M-40-IS-0	M-40-IS -10	M-40-IS- 15	M-40-IS- 20
Cement (kg/m3)	345	342	323	304
Water (kg/m3)	137	137	136	136
Sand (kg/m3)	685	673	673	673
Coarse aggregate (kg/m3)	1261	1240	1241	1241
Alccofine (kg/m3)	0.00	37.95	56.92	75.90

TABLE 2 CONSTITUENTS OF DIFFERENT MIXES FOR M-40 GRADE, ACCORDING TO BS(DOE) METHOD

Mixes	M-40-BS- 0	M-40-BS- 10	M-40-BS-15	M-40-BS-20
Cement (kg/m3)	300	330	320	307
Water (kg/m3)	125	142	139	138
Sand (kg/m3)	711	665	662	660
Coarse aggregate (kg/m3)	1349	1260	1257	1253
Alccofine (kg/m3)	0	36.67	56.47	76.75

TABLE3 : CONSTITUENTS OF DIFFERENT MIXES FOR M-50 GRADE ACCORDING TO IS METHOD

Mixes	M-40-IS 0	M-40-IS 10	M-40-IS 15	M-40-IS 20
Cement (kg/m ³)	394	389.7	368	346
Water (kg/m ³)	136.67	136.70	136.67	136.68
Sand (kg/m ³)	667	654	656	656
Coarse aggregate (kg/m ³)	1230	1206	1206	1207
Alccofine (kg/m ³)	0.00	43.30	64.95	86.60

TABLE 4 : CONSTITUENTS OF DIFFERENT MIXES FOR M-50 GRADE ACCORDING TO BS(DOE) METHOD

Mixes	M-50-BS 0	M-50-BS 10	M-50-BS 15	M-50 BS 20
Cement (kg/m ³)	360	396	384	370
Water (kg/m ³)	125	145	142	140
Sand (kg/m ³)	691	638	636	633
Coarse aggregate (kg/m ³)	1309	1197	1191	1185
Alccofine (kg/m ³)	0	44.26	67.76	92.50

M 40-IS 0, M50-IS 0, M40 BS 0& M50-BS 0- concrete mix without any replacement.

M 40-IS10, M50-IS 10, M40 BS 10& M50-BS 10- - concrete mix with 10% replacement of PPC by alccofine.

M 40-IS 15, M50-IS 15, M40 BS 15& M50-BS 15- concrete mix with 15% replacement of PPC by alccofine.

M 40-IS 20, M50-IS 20, M40 BS 20 0& M50-BS 20- concrete mix with 20% replacement of PPC by alccofine

[7] *Grade of Concrete*:-The mix proportion of this investigation was 1:1.98:3.65(W/C 0.39) and 1:2.37:4.49 (W/C 0.42) for M40 grade according to IS and DOE (BS) method respectively..and 1:1.69:3.12 (W/C 0.35)and 1:1.92:3.63 (W/C 0.35)for M50 grade according to IS and DOE (BS) method respectively was adopted.

IV. PREPARATION OF SPECIMENS

The strength characteristics of concrete with varying percentage of alccofine were studied by casting cubes. The constituents of the concrete via, cement, fine aggregate and coarse aggregate were mixed to appropriate proportion by adding water Alccofine is added to the different mix in varying proportion as a partial replacement for cement. Moulds for cube of size 150 x 150 x 150mm were prepared and concrete was poured in to the mould layer by layer and compacted thoroughly. The specimens were removed from the moulds after 24 hours and then the specimens were cured with water for 28 days.

V. RESULT AND DISCUSSIONS

It was found from the experimental results that the compressive strength has increased for the specimens with varying percentage of alccofine as replacement for cement when compared with the conventional concrete at

percentage of 10% after that adding of alccofine increases the strength decreases gradually. The optimal dosage at 10% gives the good strength. The test result obtained are presented in table

TABLE 5: 7 AND 28 DAYS COMPRESSIVE STRENGTH OF CONCRETE CONTAINING VARIOUS PERCENTAGE OF ALCCOFINE BY IS AND DOE (BS) METHOD FOR M 40 GRADE OF CONCRETE.

Mix no.	7 days strength	28 days strength
M40 IS 0	19.40	28.83
M40 IS 10	26.60	38.20
M40 IS 15	23.11	35.30
M40 IS 20	21.42	33.03
M40 BS 0	17.83	24.61
M40 BS 10	23.80	34.83
M40 BS 15	29.10	32.21
M40 BS 20	26.75	28.67

Fig. 1: Graphical representation of 7 days strength obtained for M 40 mixes

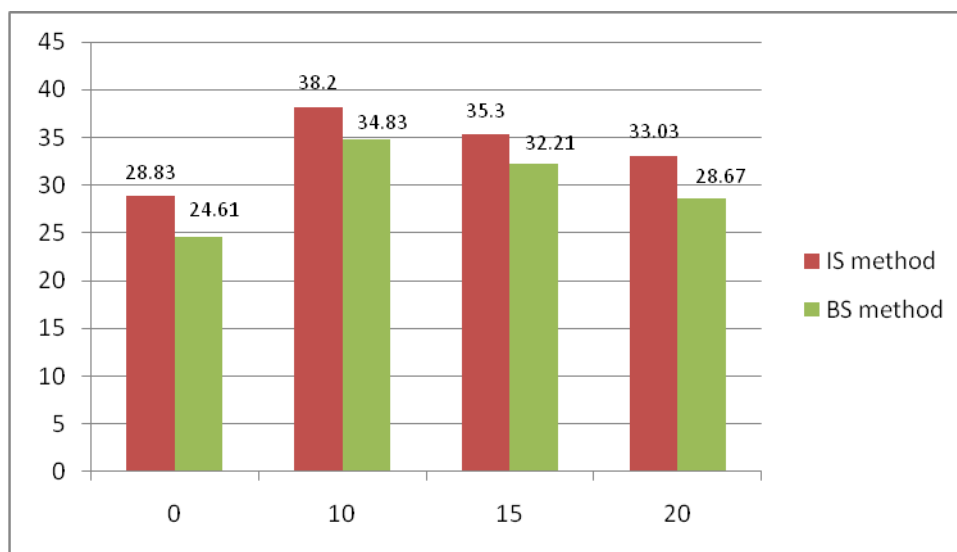


Fig. 2: Graphical representation of 28 days strength obtained for M40 mixes

TABLE 6 7 AND 28 DAYS COMPRESSIVE STRENGTH OF CONCRETE CONTAINING VARIOUS PERCENTAGE OF ALCCOFINE BY IS AND DOE (BS)METHOD FOR M 50 GRADE OF CONCRETE.

Mix no.	7 days strength	28 days strength
M50 IS 0	24.21	34.70
M50 IS 10	33.60	47.95
M50 IS 15	30.03	44.34
M50 IS 20	26.49	37.96

M50 BS 0	20.92	31.11
M50 BS 10	30.12	43.33
M50 BSI 15	26.65	41.87
M50 BSI 20	23.66	35.40

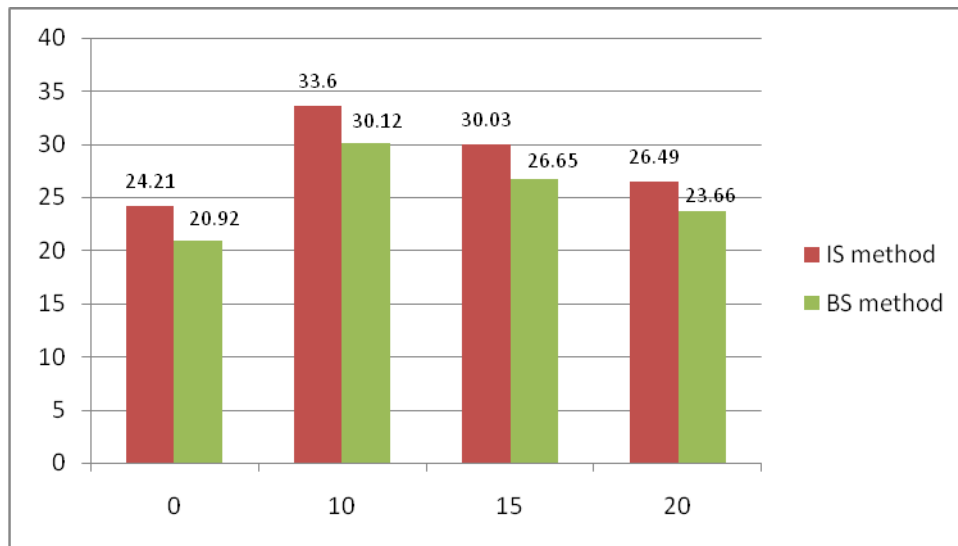


Fig. 3: Graphical representation of 7 days strength obtained for M50 mixes

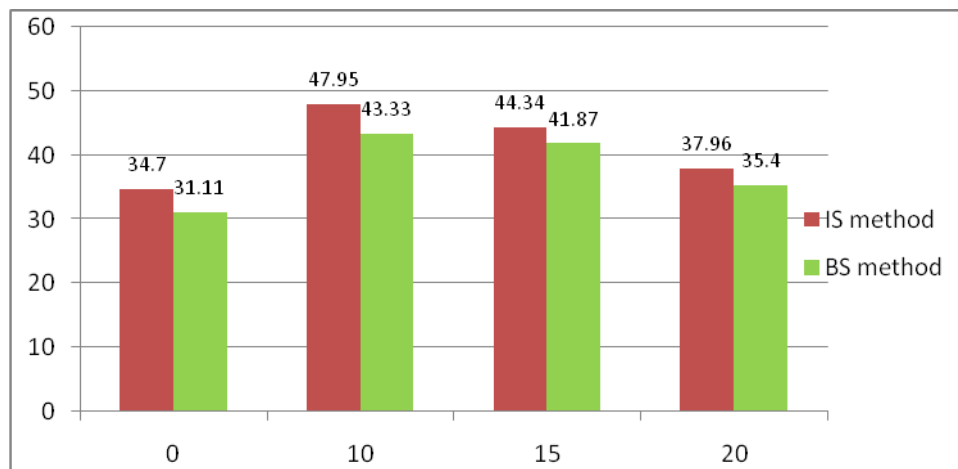


Fig. 4: Graphical representation of 28 days strength obtained for M50 mixes

Table 7. SLUMP OF CONCRETE CONTAINING VARIOUS PERCENTAGE OF ALCCOFINE BY IS AND DOE (BS)METHOD FOR M 40 GRADE OF CONCRETE

MIXES	SLUMP
M40-IS-0	55
M40-IS-10	30
M40-IS-15	15

M40-IS-20	07
M40-BS-0	67
M40-BS-10	40
M40-BS-15	29
M40-BS-20	13

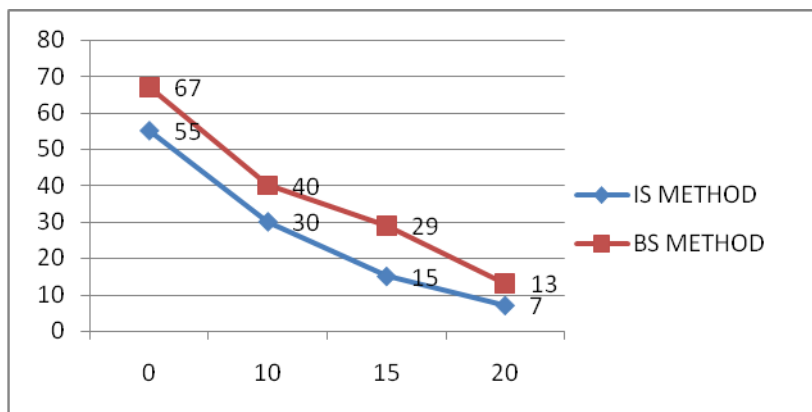


Fig.5: Graphical representation of Slump for M40 grade at varying % of alccofine

Table 8 SLUMP OF CONCRETE CONTAINING VARIOUS PERCENTAGE OF ALCCOFINE BY IS AND DOE (BS)METHOD FOR M 40 GRADE OF CONCRETE

MIXES	SLUMP
M50-IS-0	51
M50-IS-10	28
M50-IS-15	12
M50-IS-20	04
M50-BS-0	64
M50-BS-10	42
M50-BS-15	23
M50-BS-20	09

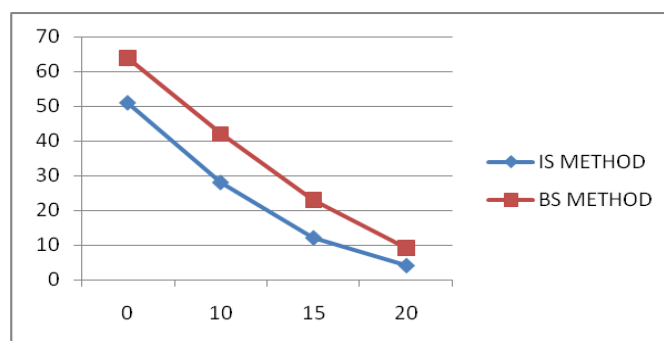


Fig..6: Graphical representation of Slump for M50 grade at varying % of alccofine

VI. CONCLUSIONS

In this study series of the experiments have been conducted on concrete with the addition of alccofine as partial replacement of PPC. In the alccofine was used as partial replacement of PPC in different percentage that is 0%, 10%, 15% and 20% of the dry weight of the cement. The experiments were conducted on M-40 AND M50 grade of concrete as per relevant IS code of practice and BS (DOE) method Based on the test results obtained from this study the following conclusion can be drawn.

1. According to these results Super Plasticizers, for high-strength concretes by decreasing the w/c ratio as a result of reducing the water content by 20–30%.
2. IS method gives max. Strength as comparison of BS (DOE) method.
3. By adding of alccofine at 0, 10, 15, 20% at 10% gives optimal result and increases strength up to 10% and after 10% it addition strength decreases.
4. The BS method of mix design as per BSEN: 206-11 is more comprehensive whereas, IS method is simple and straight forward.
5. IS Code Method (IS: 10262:2009) gives lesser proportion of fine aggregates for the mix which causes the abrasiveness in the mix.
6. The slump value is decreases by adding increase percentage of alccofine..
7. BS (DOE) method gives more binder content with more proportion of fine aggregate, leading to reduced strength of the mix.

REFERENCES

- [1] BIS Code IS: 456-2000. Code of Practice for Plain and Reinforced Concrete (fourth revision).
- [2] BIS Code IS: 10262-2009. Code of Practice for Concrete Mix Proportioning- Guidelines (First Revision)
- [3] BIS Code IS: 383-1970. Specification for Coarse and Fine Aggregate from Natural Source for Concrete (Second Revision)
- [4] British . Code of practice for Concrete Mix Proportioning –Guidelines
- [5] Ansari U.S. et.al, “High Performance Concrete with Partial Replacement of Cement by ALCCOFINE & Fly Ash”
- [6] Saurabh Gupta “Effect on compressive strength of high performance concrete incorporating alccofine and fly ash”



- [7] *SudarsanaRaoHunchate et.al, "Mix Design Method Of High Performance Concrete Using Silica fume And Superplasticizers"*
- [8] *Sishminder Pal Singh, "Influence of superplasticizers on flow and strength characteristics of concrete"*
- [9] *K Shyam Kumar et.al, "Effects Of Minerals admixtures On The Mechanical And Durability Performance Of High performance concrete"*
- [10] *R.T. and S.P.Mishra, Nasrathullah Amar khail, "Effects Of silica fume On Properties Of High Strength Concrete"*
- [11] *SalahaldeinAlsadey, "Effect of Superplasticizers on Fresh and Hardened Properties of Concrete"*
- [12] *Srinivas Allen, "Ultra High Strength Concrete"*
- [13] *M.S. Shetty (2008), Concrete Technology, S.Chand and CompanyLtd.,Ramanagar, New Delhi.*
- [14] *Shridhar R., (2002), Use of Chemical admixtures in HPC for durable structures, The Indian Concrete Journal, 76(9), pp579-580.*
- [15] *Kinoshita,Metal "application of new superplasticizer for Ultra high strength concrete". Proceedings of Japan cement association Japan 1990.*
- [16] *V.M. MALHOTRA "Results of a laboratory study Superplasticizers in concrete".*