



A REVIEW OF LOAD BALANCING IN VEHICULAR ADHOC NETWORKS

Sachin Khurana¹, Dr. Gaurav Tejpal², Dr. Sonal Sharma³

¹Research Scholar, Shri Venkateshwara university, Gajraula (India)

²Professor, Shri Venkateshwara university, Gajraula (India)

³Assistant Professor, Department of computer Applications Uttaranchal University Dehradun (India)

ABSTRACT

For overcoming the automobile to car repeated disconnection issue in VANETs knowledge dissemination, several strategies have already been planned, such as the provision of Path Area Units (RSUs). Because of the small wireless transmission range of RSUs and car freedom, a car uses just a small time frame inside the number of an RSU. This restriction, as well as possible overload of RSUs sited near active path junctions, may signify needs from vehicles are not offered within the prescribed deadlines. In that report, we propose a supportive fill balancing method among RSUs, by which an RSU can move the overload needs to different RSUs. Load move is performed based on numerous factors: demand wait threshold, recent fill of the transferee RSU, and the path by which the automobile is heading. Applying a series of simulation studies, we demonstrate that the planned supportive fill balancing method outperforms the non-cooperative (stand-alone) strategies in a wide selection of circumstances based on our performance metrics.

Keywords: - VANETs; mobility model; vehicular load balancing; AODV; DSDV; ZRP

I. INTRODUCTION

To enhance the grade of wireless connection and increase the number of network purposes in Vehicular Ad Hoc Sites (VANET), a hybrid VANET structure is planned by the mix of the Wireless Mesh System (WMN) and the Ad Hoc Network. Making use of site information, obstruction monitoring and routing move, we style a regional load managing routing in hybrid VANETs, namely GLRV. The mesh routers are deployed to supply backbone supports. Knowledge package are given in the proper execution of forwarding set to supply multiple forwarding candidates. Three routing move strategies are created to guarantee the Quality of Company (QoS) under numerous system connectivity and load scenarios, which are mesh routing when the mesh router is available, regional selfish routing when the system connectivity is good, and opportunistic routing when the system connectivity is poor. Simulation results reveal that GLRV can reduce steadily the transmission latency and improve system delivery relation in hybrid VANET architecture. System topology in VANET atmosphere could be the nodes' flexibility model as the nodes 'connectivity is straight influenced by the nodes 'mobility. Drivers are now beginning to use navigation systems that use vehicular load managing scheme to obtain the quickest way for their desired destinations. We consider the effectuation of a load-balanced flexibility³ model to the system efficiency in VANET environment. Three topology-based routing protocols which are AODV, DSDV, and ZRP, will soon be used. Moreover, we analyze the system efficiency of every routing protocol on the designed flexibility models. We use VANETs MobiSim to generate the vehicles 'activities and System Simulator 2 to mimic the info communications. We end that the system shows on the flexibility model with load



managing scheme often decrease fairly to the system without load managing scheme. The absolute most suitable routing protocol for the designed flexibility models is DSDV.

II. LOAD BALANCING TECHNIQUES IN VANET

A. Proactive routing protocol, DSDV Destination-Sequenced Distance Vector (DSDV) nodes maintain paths to every reachable DSDV nodes in the network. DSDV redirecting access includes location nodes, route metrics, next get, and destination-stamped routine numbers [10]. DSDV employs routine numbers to distinguish stale paths from fresh kinds [10]. That routine number also reduces the formation of redirecting loops [11]. DSDV nodes deliver route upgrade packets regularly to maintain the redirecting desk entries. That transmission can also be occurred when network topology changes are detected [11]. Every route with a higher routine number is definitely preferred. When there are paths with the exact same routine number, the route with better route metric will be preferred. One important benefit of DSDV is DSDV has a very low route startup wait because every DSDV nodes possess route availability to all or any destinations [10]. Nevertheless, higher node flexibility and a higher amount of nodes may cause too much of get a grip on traffic due to damaged hyperlinks occurred in the network [10]. That extortionate level of get a grip on traffic results in a lowered network throughput performance.

B. Reactive routing protocol, AODV Ad-hoc on Need Distance Vector (AODV) routing is a good example of a reactive routing protocol. Nodes applying reactive routing protocol do not maintain its routing table most of the time. Alternatively, when a node must communicate with another node, it will flood a way request package to the network to obtain the road to the destination. You can find three different get a grip on packages in AODV, they're Way Request (RREQ), Way Response (RREP) and Way Problem (RRER). RREQ is caused when a node must communicate with another node. Every node maintains two split up tables: node routine number and broadcast_id [12]. The RREQ package contains different variables: source_addr, source_sequence_#, broadcast_id, dest_addr, dest_sequence_#, and hop_cnt [12]. The source_addr and broadcast_id pair suggests a bundle as an RREQ package [12]. The broadcast_id number is always incremented every time a resource node broadcast a brand new RREQ package [12]. Each node can respond the RREQ package by transferring RREP package or rebroadcast it to its neighboring nodes after incrementing the hop rely value. It's possible if your node receives the same RREQ package that formerly seen. The same broadcast_id and source_addr show the same RREQ package [12]. In case a node receives the same RREQ package, it will not rebroadcast the package and calmly ignore it. Way reply package is employed to respond an RREQ packet. That package is can only transmitted by the nodes that have the present route to the required destination. These nodes could be the destination it self or even a node that has the present route to the required destination. RREQ package moves across the opposite path. That opposite path is created since the RREQ package moves through the nodes. Unlike the RREQ package, RREP package is submitted a unicast fashion back again to the seeking node. Because the RREP package moves toward the foundation node, each node across the opposite path upgrades its routing information for the foundation node and the destination node stated in the RREP package [12]. Each time a url pauses, RRER package is sent to the influenced resource node every time a package attempts to utilize the links [10].

C. Hybrid Protocol, ZRP: Zone Routing Method (ZRP) is a good example of cross proactive/reactive protocol. ZRP limits the practical method simply to the node's regional neighborhood while the research throughout the network is completed reactively by effectively querying picked nodes in the network, as opposed to querying all the network nodes [13]. The ZRP retains their redirecting zone which consists of practical component called the Intrazone Routing Method (IARP). IARP proactively maintain the paths for nodes inside the source node redirecting zone. ZRP employs the reactive Inter zone Routing Method (IERP) to acquire paths for nodes beyond the redirecting zone of the source node. IERP employs the data given by IARP for the whole path between supply node and location node [10]. Determine 1 reveals a redirecting zone of node S with a radius of 2 hops. Routing zone parameter is created with a dotted range around the node S. we are able to see there are nodes which are just hops away from the node S. As we are able to see in Determine 1 nodes A-F are labeled as inside nodes being that they are based inside redirecting zone of the source node. While GK nodes are peripheral nodes whose minimal distance to the source node is hops away. Each ZRP node retains redirecting information only for the nodes inside their redirecting zone. Considering that the upgrade boxes are propagated locally within the redirecting zone, the amount of upgrade traffic can be much smaller than it is in a pure reactive redirecting protocols. A node understands about their zone and retains the redirecting information for the redirecting zone using IARP.

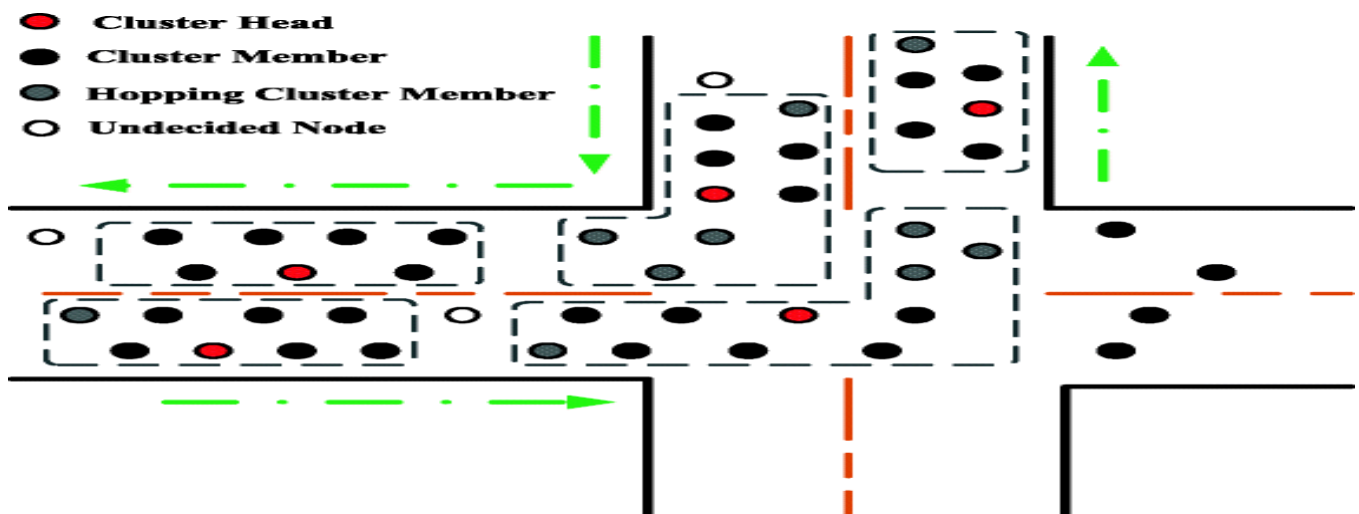


Fig 1: Load Balancing in VANETs

III. CONCLUSION

In that report, we propose a supportive fill balancing method among RSUs, by which an RSU can move the overload needs to different RSUs. Load move is performed based on numerous factors: demand wait threshold, recent fill of the transferee RSU, and the path by which the automobile is heading. Applying a series of simulation studies, we demonstrate that the planned supportive fill balancing method outperforms the non-cooperative (stand-alone) strategies in a wide selection of circumstances based on our performance metrics.

REFERENCES

[1]. Ali, GG Md Nawaz, Edward Chan, and Wenzhong Li. "On scheduling data access with cooperative load balancing in vehicular ad hoc networks (VANETs)." The Journal of Supercomputing 67.2 (2014): 438-468.



- [2]. Wu, Di, et al. "Geographic load balancing routing in hybrid vehicular ad hoc networks." *Intelligent Transportation Systems (ITSC)*, 2011 14th International IEEE Conference on. IEEE, 2011.
- [3]. ZRP Using Vehicular Traffic Load Balancing Scheme on VANETs." *International Journal of Simulation System, Science and Technology* (2015).
- [4]. Rodriguez, Jaime, et al. "Load balancing in a realistic urban scenario for LTE networks." *Vehicular Technology Conference (VTC Spring)*, 2011 IEEE 73rd. IEEE, 2011.
- [5]. Hashemi, Hosna Tashakkori, and Siavash Khorsandi. "Load balanced vanet routing in city environments." *Vehicular Technology Conference (VTC Spring)*, 2012 IEEE 75th. IEEE, 2012.
- [6]. Huang, Chenn-Jung, et al. "A Load Balancing and Congestion-Avoidance Routing Mechanism for Real-Time Traffic over Vehicular Networks." *J. UCS*15.13 (2009): 2506-2527.
- [7]. Lu, Hongsheng, and Christian Poellabauer. "Balancing broadcast reliability and transmission range in VANETs." *Vehicular Networking Conference (VNC)*, 2010 IEEE. IEEE, 2010.
- [8]. Wu, Tin-Yu, Mohammad S. Obaidat, and Hung-Lin Chan. "QualityScan scheme for load balancing efficiency in vehicular ad hoc networks (VANETs)." *Journal of Systems and Software* 104 (2015): 60-68.
- [9]. Yan, Wei, Yuan Xue, and Bradley Malin. "Scalable and robust key group size estimation for reducer load balancing in MapReduce." *Big Data*, 2013 IEEE International Conference on. IEEE, 2013.
- [10]. Aljeri, Noura, et al. "A Performance evaluation of load balancing and QoS-aware gateway discovery protocol for VANETs." *Advanced Information Networking and Applications Workshops (WAINA)*, 2013 27th International Conference on. IEEE, 2013.
- [11]. El Mouna Zhioua, Ghayet, et al. "A fuzzy multi-metric QoS-balancing gateway selection algorithm in a clustered VANET to LTE advanced hybrid cellular network." *IEEE Transactions on Vehicular Technology* 64.2 (2015): 804-817.
- [12]. Rybicki, Jędrzej, et al. "Challenge: peer on wheels-a road to new traffic information systems." *Proceedings of the 13th annual ACM international conference on Mobile computing and networking*. ACM, 2007.
- [13]. Liaskos, Christos, et al. "Balancing wireless data broadcasting and information hovering for efficient information dissemination." *IEEE transactions on broadcasting* 58.1 (2012): 66-76.
- [14]. Gerla, Mario, et al. "Vehicular grid communications: the role of the internet infrastructure." *Proceedings of the 2nd annual international workshop on Wireless internet*. ACM, 2006.
- [15]. Psaras, Ioannis, and Lefteris Mamatras. "On demand connectivity sharing: Queuing management and load balancing for user-provided networks." *Computer Networks* 55.2 (2011): 399-414.
- [16]. Bitam, Salim, and Abdelhamid Mellouk. "Its-cloud: Cloud computing for intelligent transportation system." *Global Communications Conference (GLOBECOM)*, 2012 IEEE. IEEE, 2012.
- [17]. Li, Hui, Aihuang Guo, and Guangyu Li. "Geographic and traffic load based routing strategy for VANET in urban traffic environment." (2010): 6-9.
- [18]. Bononi, Luciano, et al. "Parallel and distributed simulation of wireless vehicular ad hoc networks." *Proceedings of the 9th ACM international symposium on Modeling analysis and simulation of wireless and mobile systems*. ACM, 2006.