

EXPERIMENTAL INVESTIGATION OF PARTICAL REPLACEMENT

Use of Waste Tyres in Road Construction

¹GUFRAN KHAN, ²MANIKANT YADAY, ³PRAHALAD,

⁴VINOD KUMAR, Mr. SURYA PARKASH SHARMA

UG Students ,Department of Civil Engineering,

BIT GIDA GORAKHPUR.

Asst. prof Department of Civil Engineering,

Buddha Institute of Technology, Gida. Gorakhpur

Abstract –

Now-a-days disposal of different wastes produced from different Industries is a great problem. These materials pose environmental pollution in the nearby locality because many of them are non-biodegradable. The modified bitumen and granulated or ground rubber or crumb rubber can be used as a portion of the fine stone aggregate. A mixture of hot bitumen and crumb rubber derived from post-consumer waste or scrap tyres. It is a material that can be used to seal cracks and joints, be applied as a chip seal coat and added to hot mineral aggregate to make a unique asphalt paving material.

1. INTRODUCTION

The American Society of Testing and Materials (ASTM D8) defines rubberised bitumen as “a blend of asphalt cement [bitumen], reclaimed tyre rubber and certain additives, in which the rubber component is at least 15% by weight of the total blend and has reacted in the hot asphalt cement [bitumen] sufficiently to cause swelling of the rubber particles,” [AST05] This definition was developed in the late 1990’s. Centre for Transportation Engineering of Bangalore University compare the properties of the modified bitumen with ordinary bitumen. It was observed that the penetration and ductility values of the modified bitumen decreased with the increase in proportion of the plastic additive, up to 12 percent by weight. Therefore the life of the pavement surfacing using the modified bitumen is also expected to increase substantially in comparison to the use of ordinary

bitumen. . mixture with improved resistance to studded tyres as well as to snow chains, via a process known as “dry process”. In the same period Charles McDonalds, a materials engineer of the city of Phoenix in Arizona (USA), was the first to find that after thoroughly mixing crumbs of RTR with bitumen (CRM) and allowing it to react for a period of 45 min to an hour.,

Table -1: Ground Tyre Rubber Gradation

Sieve	Percent Passin
2 mm, #10	100
1.18 mm, #16	65-100
600 μm , #30	20-100
300 μm , #50	0-45
75 μm , #200	0-5

1.1 HISTORY

Rubberized Bitumen is being used in USA from 1960 Currently Arizona, Florida, Texas and California using 2 million tons of Rubberized Bitumen. Rubberized Bitumen is very popular in Australia for. mixture with improved resistance to studded tyres as well as to snow chains, via a process known as “dry process”. In the same period Charles McDonalds, a materials engineer of the city of Phoenix in Arizona (USA), was the first to find that after thoroughly mixing crumbs of RTR with bitumen (CRM) and allowing it to react for a period of 45 min to an hour, this material captured beneficial engineering characteristics of both base ingredients. He called it Asphalt Rubber and the technology is well known as the “wet process”.

By 1975, Crumb Rubber was successfully incorporated into asphalt mixtures and in 1988 a definition for rubberised bitumen was included in the American Society for Testing and Materials (ASTM) D8 and later specified in ASTM D6114- 97. In 1992 the patent of the McDonald's process expired and the material is now considered a part of the public domain. Furthermore, in 1991, the United States federal law named “Intermodal Surface Transportation Efficiency Act” (then rescinded), mandated its widespread use, the Asphalt-Rubber technology concept started to make a “quiet come back”. Since then, considerable research has been done worldwide to validate and improve technologies

related to rubberised asphalt pavements. Nowadays, these rubberised bitumen materials, obtained through the wet process, have spread worldwide as solutions for different quality problems (asphalt binders, pavements, stress absorbing lays and inlayers, roofing materials,etc.) with much different evidence of success demonstrated by roads built in the last 30 years.

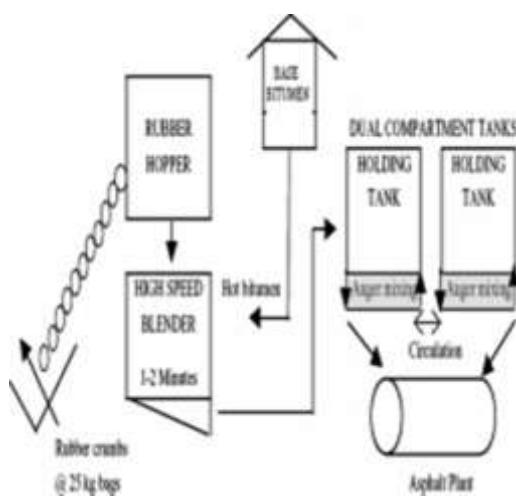


Fig-1.Schematic diagram of McDonald process

2. PROCESS OF MAKING RUBBERISED BITUMEN

This terminology is related to the system of producing RTR-MB with the original wet process proposed by Charles McDonald in the 1960s. The McDonald blend is a Bitumen Rubber blend produced in a blending tank by blending Crumb Rubber and bitumen. This modified binder is then passed to a holding tank, provided with augers to ensure circulation, to allow the reaction of the blend for a sufficient period (generally 45–60 min). The reacted binder is then used for mix production.

Continuous Blending-reaction Systems: This system is similar to the McDonald process of blending, the difference is that CRM and bitumen are continuously blended during the mix production or prepared by hand and then stored in storage tanks for later use. Therefore, it consists of a unique unit with agitators, in which the reaction occurs during the blending.



Fig.2.Rubberised Bitumen as a slurry seal


3. USES OF RUBBERISED BITUMEN

In the paper a new physical tyre thermal model is presented. The model, called Thermo Racing Tyre (TRT) was developed in collaboration between the Department of Industrial Engineering of the University of Naples Federico II and a top ranking motor-sport team.

The model is three-dimensional and takes into account all the heat flows and the generative terms occurring in a tyre. The cooling to the track and to external air and the heat flows inside the system are modelled.

Regarding the generative terms, in addition to the friction energy developed in the contact patch, the strain energy loss is evaluated. The model inputs come out from telemetry data, while its thermodynamic parameters come either from literature or from dedicated experimental tests. The model gives in output the temperature circumferential distribution in the different tyre layers (surface, bulk, inner liner), as well as all the heat flows. These information have been used also in interaction models in order to estimate local grip value. The experiments carried out by Grosch [1] were the first to demonstrate the strong relationship between the frequency response of rubber and its friction against a hard substrate. Grosch found that the variation of friction with temperature follows exactly that of the rubber's stress-strain FRF (frequency response function) with temperature. The latter is quantified by the WLF (Williams, Landel and Ferry) equation [2], which predicts a horizontal shift of the FRF to the right of the logarithmic frequency scale, as the temperature of the rubber increases. Grosch distinguished two different components in rubber friction, namely adhesion and deformation. The former involves molecular interaction and manifests on smooth surfaces and at low speeds, while the latter is

related to high-speed sliding on rough surfaces. Fig -3: Crumb rubber chip seal

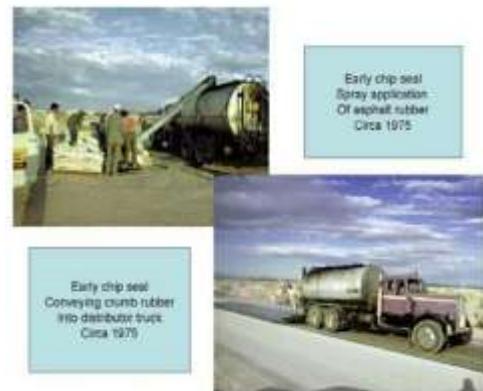

3.1 Rubberised Bitumen as a Slurry Material:

Recognizing that fatigue cracking generally occurred in larger areas than small patches couldn't handle, the concept was extended to full pavement sections by spreading the rubberised bitumen with slurry seal equipment, Figure 2, followed by aggregate application with standard chip spreaders [MCD81]. This process had two distinct construction problems. First, in order to achieve the desired reaction of the bitumen and crumb rubber in the limited time available in the slurry equipment, it was necessary to employ bitumen temperatures of 4500 F (2320 C) and higher. Second, the thickness of the membrane varied directly with the irregularity of the pavement surface. This resulted in excessive materials in areas such as wheel ruts and insufficient membrane thickness.

For these seal coat type application projects a boot truck distributor was used to apply the AR. In these early applications the ground tyre rubber was introduced into the top of the boot lorry and mixed by rocking the lorry forward and backward. Even with this rather primitive early technology it was possible to construct the first full scale at a temperature of between 163°C and 191°C (325°F and 375°F) until it is introduced into the mixing plant Samples of the rubber, base bitumen, and AR mixture are taken and tested accordingly. The ARFC, which typically has one percent lime added to the mix, is placed with a conventional laydown machine and immediately rolled with a steel wheel roller.

4. Rubberised Bitumen Mix Construction:

Construction of an AR pavement involves first mixing and fully reacting the crumb rubber with

the hot bitumen as required by specification. Typically 20 percent ground tyre rubber that meets the gradation shown in Table 1 and is added to the hot base bitumen. The bitumen needs to have a temperature of about 177°C (about 350°F) before being put into the blending unit, that heats the bitumen to 191°C to 218°C (375°F to 425°F) just prior to adding the rubber particles. The rubber and bitumen are mixed for at least one hour. After reaction, the rubberised bitumen mixture is kept at a temperature of between 163°C and 191°C (325°F and 375°F) until it is introduced into the mixing plant. Samples of the rubber, base bitumen, and AR mixture are taken and tested accordingly. The ARFC, which typically has one percent lime added to the mix, is placed with a conventional laydown machine and immediately rolled with a steel wheel roller.



Fig -4: Rubberised bitumen chip seal applied to badly cracked pavement

5. Why is Rubberised Bitumen a Best Practice.

1. It is a less expensive application when used as a thin top course over failed pavement that would otherwise need replacement (California & Arizona studies);
2. It is less expensive to maintain per lane-kilometer (lane mile) in years 6 through 15 of pavement life over conventional pavements, and the same in years 1 through 5 (Arizona & California studies);
3. It significantly reduces noise as opposed to concrete pavements, and also is quieter than bituminous pavements; rubber bitumen makes urban environments more habitable (Arizona DOT studies);
4. It significantly improves wet surface traffic safety (Texas DOT studies);
5. It creates less of a “heat island” effect than with concrete pavement at surface (Arizona State University studies);
6. It provides better surface road drainage when used in an Open Grade Friction Course (Texas & Arizona studies); and
7. It is a hugely beneficial use for post-consumer waste tyre materials, using about 1,000 waste passenger tyres per lane mile (about 621 waste passenger tyres per lane-kilometer).

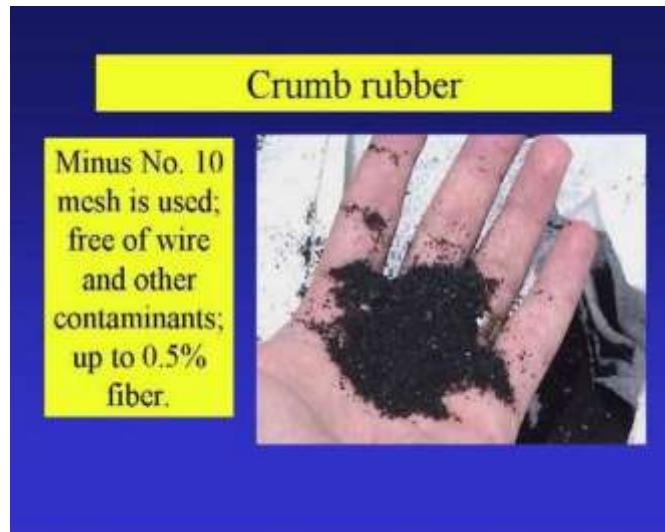


Fig -5: Crumb rubber

6. CONCLUSION

This section deals with rubberised bitumen, a binder in hot mix asphalt and chip seal applications that results from the proper addition of crumb rubber to hot bitumen and then left in a heated state to react.

Rubberised bitumen is used extensively in California, Arizona and Texas in the USA, in several countries of Western Europe, and in South Africa. It is also used to a lesser extent in parts of Canada and in a dozen more states in the USA.

The benefits are many, including reduced long-term road maintenance and expense, significant noise reductions, improved traction and reduced accident rates in wet road conditions.



Fig -6: Rubberised bitumen construction



REFERENCES

- [1] McDonald, C.H., "Recollections of Early Bitumen-Rubber History," National Seminar on Bitumen-Rubber, October 1981.
- [2] Sousa, J., Proceedings AR2000 International Conference on Rubberised bitumen, Villamora, Portugal, 2000. [3] Sousa, J., Proceedings AR2003 International Conference on Rubberised bitumen, Brazilia, Brazil, 2003. [4] [WAY79] Way, G. B., Prevention of Reflective Cracking Minnetonka-East, Report Number 1979GWI, Arizona Department of Transportation, August 1979.
- [5] D.Larson Thomas(1963), Portland Cement and Bitumen Concretes, Mc Graw Hill Publication 1963.
- [6] YoderE,J, .Witczak M.W(1975), Principles of Pavement Design, a. John Wiley son publications 2nd edition 1975. [7] Watson, D. E. and Jared, D. (1995). Stone Mastic Asphalt. Georgia Experience. Georgia Department of Transportation. USA.